

**davide groppi**

NOVELTIES 2023

/ **Novelties 2023**

Mi piace pensare alle nostre lampade come a piccole invenzioni capaci, con molta semplicità, di emozionare e sorprendere.

E, ogni volta, lo scopo della mia ricerca è dimostrare qualcosa di nuovo, mai visto prima.

Con questi sentimenti ho creato e selezionato una nuova collezione di lampade.

I like to think of our lamps as small and very simple inventions that thrill and surprise.

And each time, the aim of my research is to demonstrate something new, never seen before.

These are the sentiments I used to create and select a new collection of lamps.

INDEX	
ASINTOTO	7
UTOPIA	13
AURORA	25
COLIBRÌ	31
MAGIA	41
SOTTILE	47
SOTTOSOPRA	53
LOUIS XIV	59
VIS À VIS	65
POST PRANDIUM	71
JUST LIKE A LIGHT	77
NUIT	83
BUIO	89
HAZARD	97

La riduzione puntuale di Infinito.  
Astrazione, purezza, segno grafico.  
Spento, il disco appare enigmatico, presenza simbolica dell'assenza  
della luce.

The projected reduction of Infinito.  
Abstraction, purity, graphic sign.  
Switched off, the disc appears enigmatic, the symbolic presence of the  
absence of light.

**ASINTOTO**  
Davide Groppi, 2023



## ASINTOTO



Finish	Gravity black
Mounting	Suspension
Environment	Indoor
CCT- System flux	2700K ~ 2610 lm 3000K ~ 2680 lm
CRI	>80

Insulation class	III
Power	18 W LED
LED current	500 mA DC
Driver	Remote
Remote dimming type	DALI - PUSH** - 1-10 V** - TRIAC*

\*TRIAC version not available for US and CN market

\*\*PUSH and 1-10 V versions not available for CN market

CE  IP20

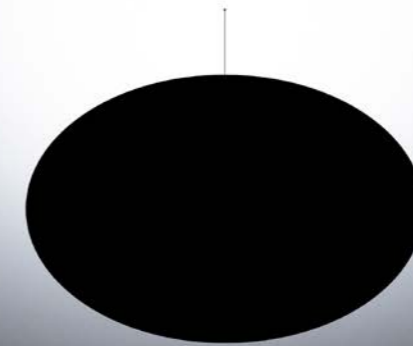

ASINTOTO


## ASINTOTO

		Global code	US code	CN code
Asintoto - Gravity black	2700K - CLIII	1A4072700.27.20	1A4072703.27.20	1A4072708.27.20
Asintoto - Gravity black	3000K - CLIII	1A4072700.30.20	1A4072703.30.20	1A4072708.30.20


Electrical power supply		Global code	US code	CN code
Driver	DALI	1Z0241180.500	-	-
Driver	PUSH - 1-10 V	1Z0240870.500	-	-
Driver	TRIAC	1Z0240850.500	-	-
Driver	DALI - PUSH - 1-10 V	-	1Z024053.500	-
Driver	DALI	-	-	1Z0241140.500

Accessories		Global code	US code	CN code
Circular panel for plasterboard		1A4520000.00.00	1A4520000.00.00	1A4520000.00.00
Ceiling rose - Matt white		1A4570300.00.00	1A4570300.00.00	1A4570300.00.00

### Installation on plasterboard - Circular panel accessory

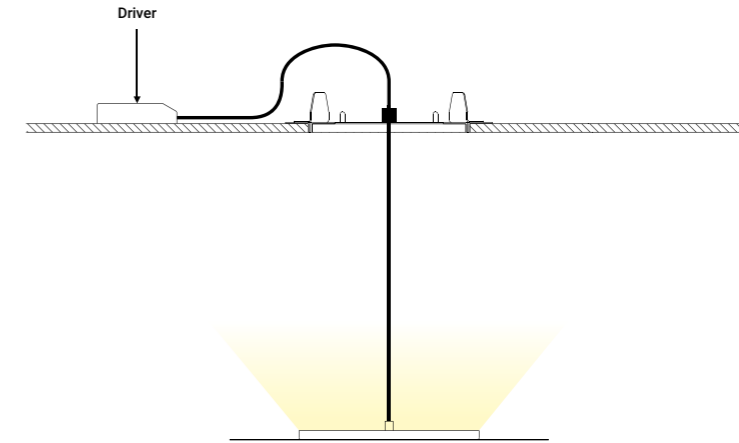

### Installation on plaster - Small ceiling rose accessory

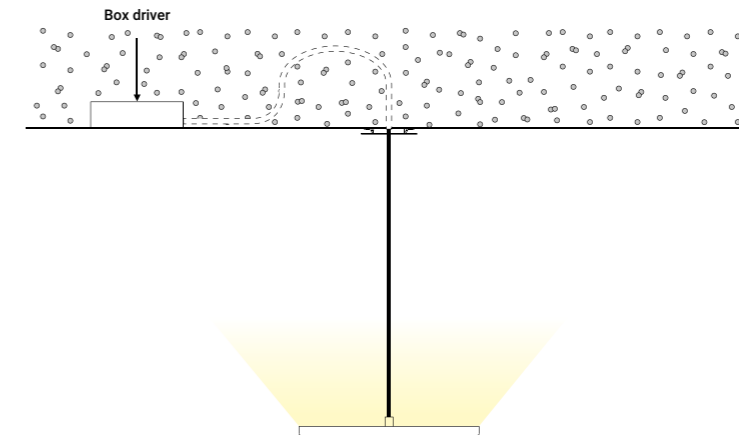


Utopia è un progetto sullo stato limite della luce, alla ricerca della dimensione minima necessaria per illuminare in modo puro ed essenziale. Rappresenta la massima flessibilità, sia nel disegno della linea che nella gestione della luce.


Il nastro luminoso si tende nello spazio, piegandosi, interrompendosi, disegnando grafi astratti e misteriosi.

Utopia is a project on the limit state of light, the research for the minimum dimension necessary for pure and essential lighting. It represents full flexibility, in both its design and its light control.

The light strip reaches into space, bending, breaking and drawing abstract, mysterious patterns.

**UTOPIA**  
Davide Groppi, 2023

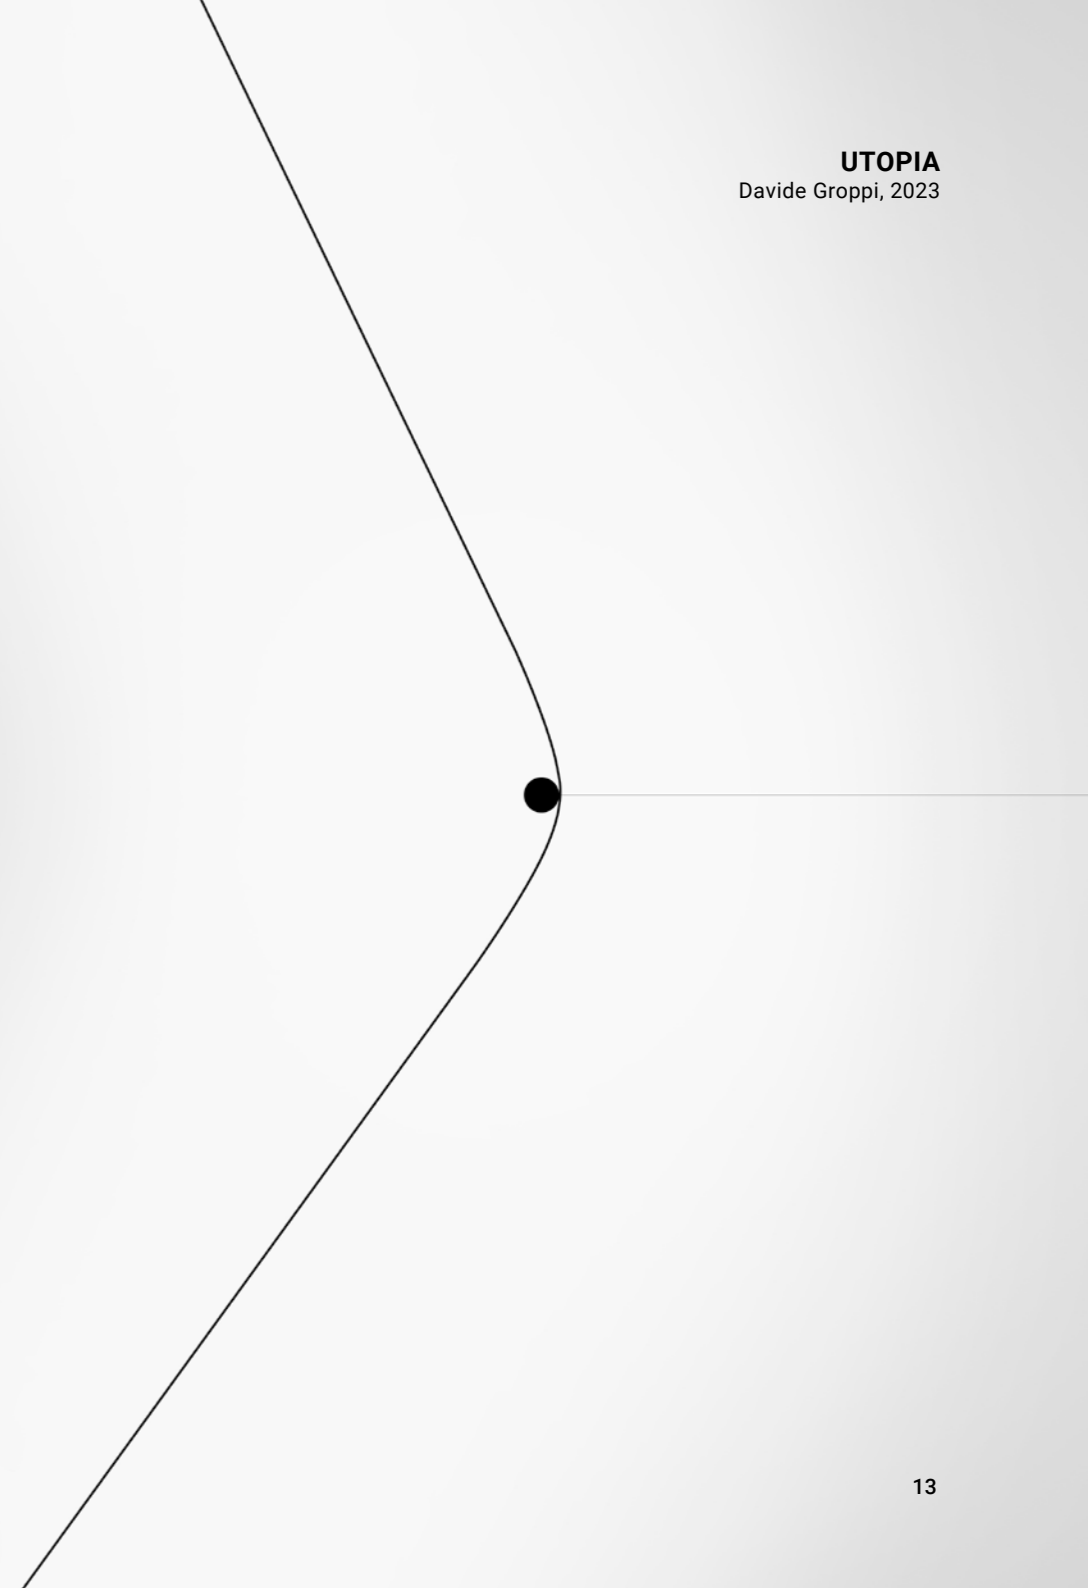



UTOPIA



## UTOPIA

Finish	Standard
Mounting	Wall / Ceiling
Environment	Indoor

### UTOPIA 6




Insulation class	III
Main voltage	24 V DC
Power	78 W LED
CCT- System flux	2700K ~ 6600 lm 3000K ~ 7050 lm
CRI	80
Driver	Power kit with plug Remote
Remote dimming type	Dimmer on board* DALI - PUSH - 1-10 V - TRIAC

### UTOPIA 12

Insulation class	III
Main voltage	24 V DC
Power	156 W LED
CCT- System flux	2700K ~ 13200 lm 3000K ~ 14100 lm
CRI	80
Driver	Power kit with plug Remote
Remote dimming type	Dimmer on board* DALI - PUSH - 1-10 V - TRIAC

\*Dimmer on board version not available for CN market

CE  IP20

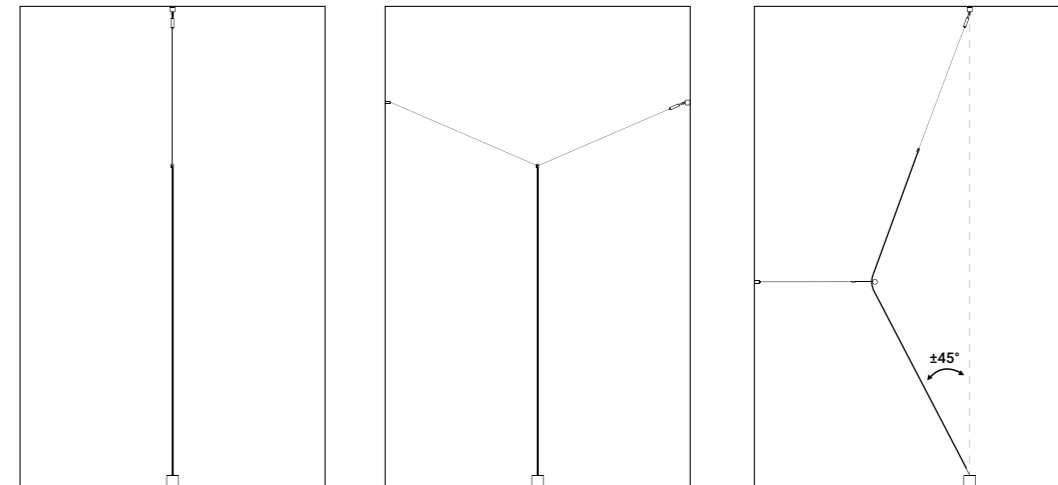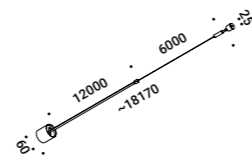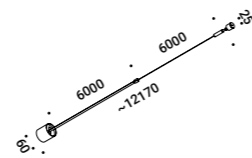

UTOPIA


## UTOPIA

		Global code	US code	CN code
Utopia 6	2700K - CLIII	1A4250000.27.20	1A4250003.27.20	1A4250008.27.20
Utopia 6	3000K - CLIII	1A4250000.30.20	1A4250003.30.20	1A4250008.30.20
Utopia 12	2700K - CLIII	1A4600000.27.20	1A4600003.27.20	1A4600008.27.20
Utopia 12	3000K - CLIII	1A4600000.30.20	1A4600003.30.20	1A4600008.30.20

Electrical power supply		Global code	US code	CN code
Utopia 6 - Driver	24V - 100W - IP67 - 1-10V	1Z1120540	1Z1120540	1Z1120540
Utopia 12 - Driver	24V - 200W - IP67 - 1-10V	1Z1120140	-	1Z1120140
Utopia 12 - Driver	24V - 100W - IP67 - 1-10V	-	1Z1120540	-
Utopia - Controller	DALI - PUSH - 1-10 V - TRIAC	1Z2170010	1Z0000034	1Z0000034
Utopia 6 - PKWP size 1 - Matt white	Dimmer on board	1A4500300.00.06	1A4500303.00.06	-
Utopia 6 - PKWP size 1 - Matt black	Dimmer on board	1A4500400.00.06	1A4500403.00.06	-
Utopia 12 - PKWP size 2 - Matt white	Dimmer on board	1A4610300.00.06	1A4610303.00.06	-
Utopia 12 - PKWP size 2 - Matt black	Dimmer on board	1A4610400.00.06	1A4610403.00.06	-


Accessories		Global code	US code	CN code
Accessory 1 - Polished chrome	Cable lock	1A4480100.00.00	1A4480100.00.00	1A4480100.00.00
Accessory 2 - Polished chrome	Side sheet + Cable lock	1A4490100.00.00	1A4490100.00.00	1A4490100.00.00

Possibility to "bend" Utopia both on the right and on the left

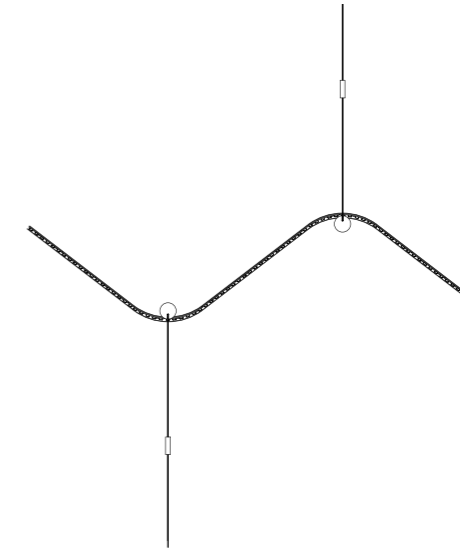

Accessory 1


Accessory 2

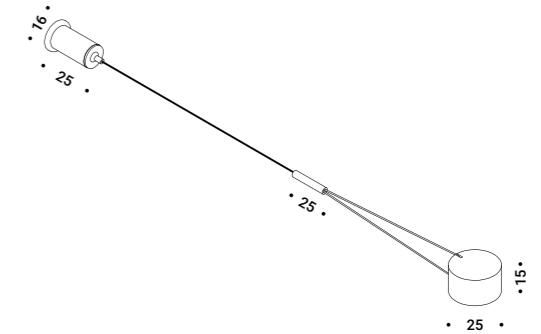

UTOPIA



UTOPIA

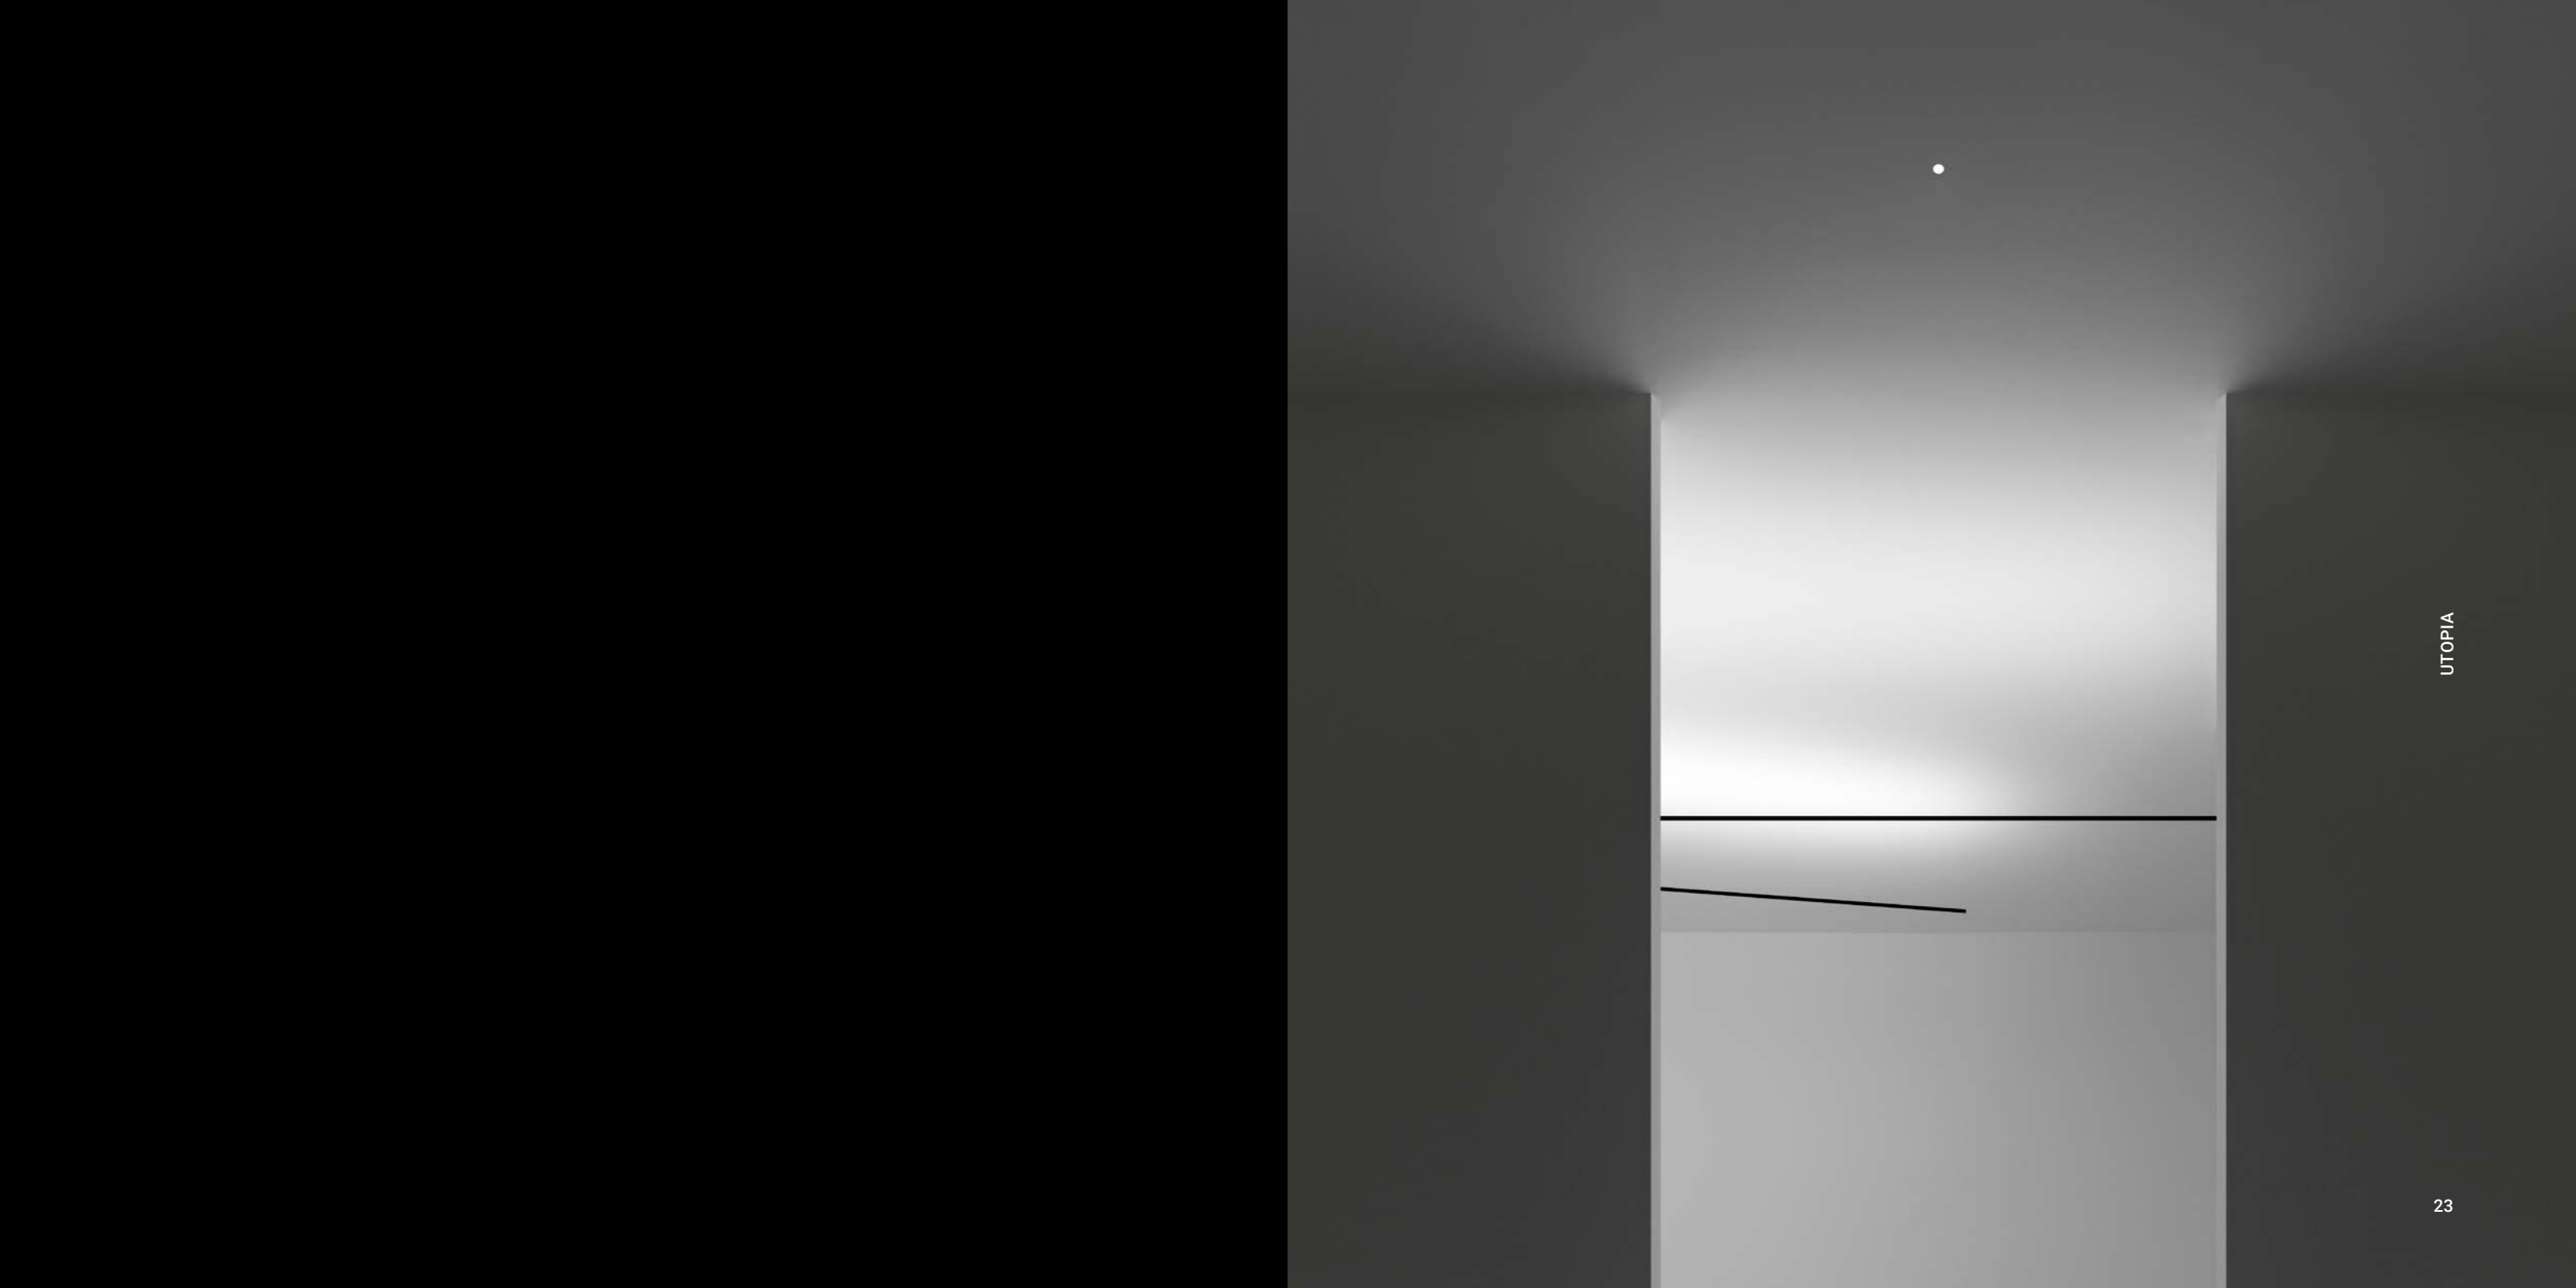

Un disco bianco, rappresentazione perfetta della luce diffusa.  
È applicabile a soffitto o a parete ed è modulabile in tutte le intensità.

A white disc, the perfect representation of diffused light.  
Can be mounted on the wall or ceiling, with modular brightness.



**AURORA**  
Davide Groppi, 2023



## AURORA

Lamp not available for US and CN market.

Finish	Matt white Matt black Copper oxide
Mounting	Wall / Ceiling
Environment	Indoor
CCT- System flux	3000K ~ 2700 lm
CRI	80
<hr/>	
Insulation class	I
Frequency	50/60 Hz
Main voltage	110-240 V
Power	28 W LED
Driver	Integrated
Dimming type	DALI - PUSH - 1-10 V




CE IP20



AURORA

## AURORA

		Global code	US code	CN code
Aurora - Matt white	3000K - DALI - PUSH - 1-10 V	1A4010300.30.07	-	-
Aurora - Matt black	3000K - DALI - PUSH - 1-10 V	1A4010400.30.07	-	-
Aurora - Copper oxide	3000K - DALI - PUSH - 1-10 V	1A4013200.30.07	-	-

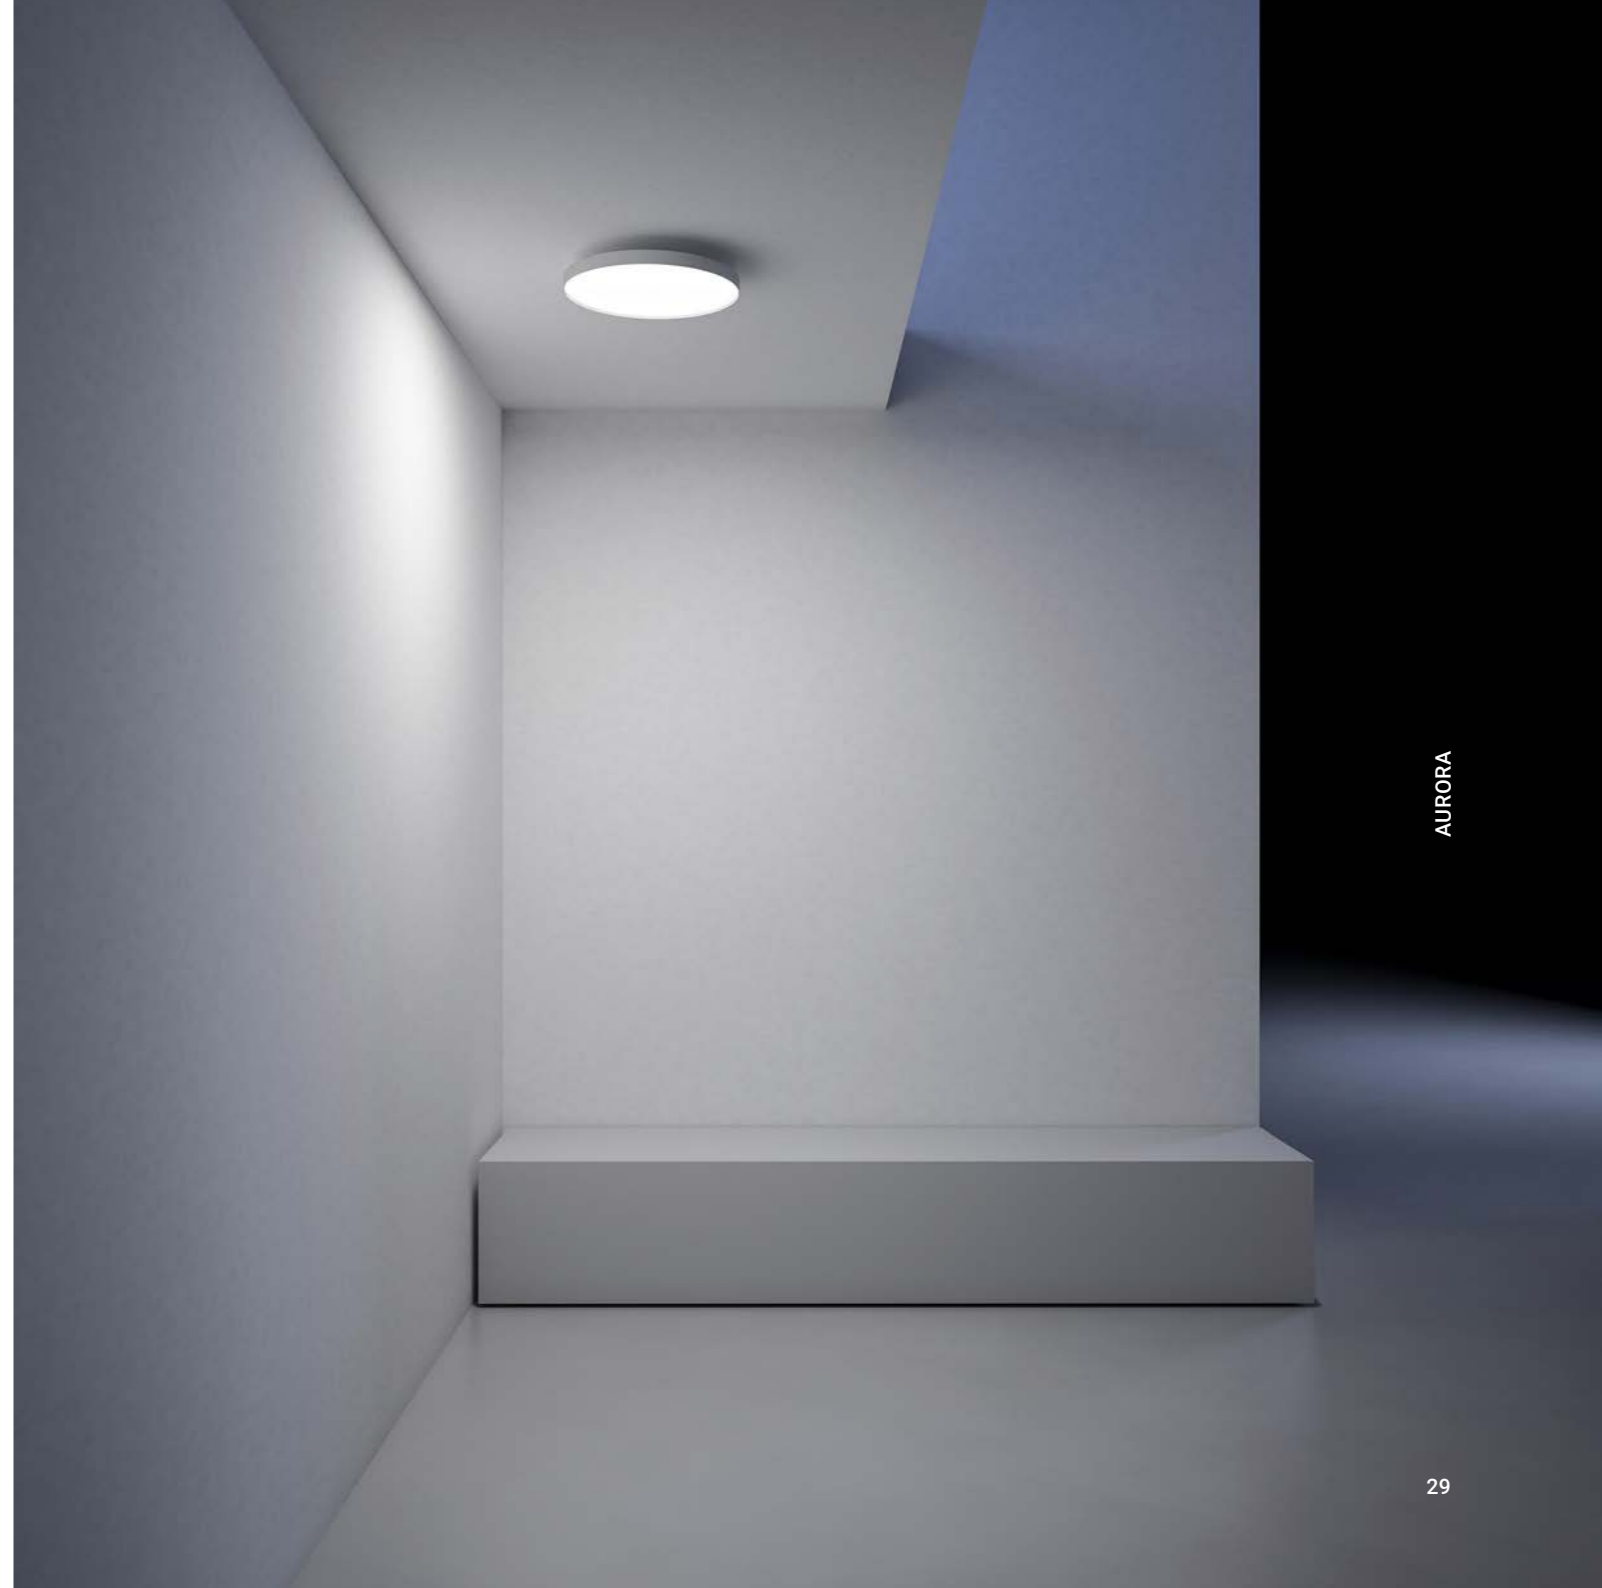

AURORA

Un sistema a binario ridotto al minimo, con minuscoli corpi luminosi, piccoli Colibri che si posano dove necessario.

A minimal track system with tiny lights, small hummingbirds that perch where needed.

**COLIBRÌ**  
Davide Groppi, 2023






## COLIBRÌ

Lamp not available for US and CN market.

Finish	Matt black
Mounting	Wall / Ceiling
Environment	Indoor


### COLIBRÌ 18

Insulation class	III
Main voltage	48 V DC
Power	2,5 W LED
Beam	15° - 30°
CCT- System flux	2700K ~ 90 lm - 94 lm 3000K ~ 99 lm - 103 lm
CRI	>90
Driver	Remote power kit
Remote dimming type	DALI



### COLIBRÌ 28













Insulation class	III
Main voltage	48 V DC
Power	3,8 W LED
Beam	16° - 30°
CCT- System flux	2700K ~ 187 lm - 192 lm 3000K ~ 203 lm - 211 lm
CRI	>90
Driver	Remote power kit
Remote dimming type	DALI







		Global code	US code	CN code
Colibri 18 - Beam 15° - Matt black	2700K - DALI	1A4260400.27.01	-	-
Colibri 18 - Beam 15° - Matt black	3000K - DALI	1A4260400.30.01	-	-
Colibri 18 - Beam 30° - Matt black	2700K - DALI	1A4270400.27.01	-	-
Colibri 18 - Beam 30° - Matt black	3000K - DALI	1A4270400.30.01	-	-
Colibri 28 - Beam 16° - Matt black	2700K - DALI	1A4280400.27.01	-	-
Colibri 28 - Beam 16° - Matt black	3000K - DALI	1A4280400.30.01	-	-
Colibri 28 - Beam 30° - Matt black	2700K - DALI	1A4290400.27.01	-	-
Colibri 28 - Beam 30° - Matt black	3000K - DALI	1A4290400.30.01	-	-






Electrical power supply		Global code	US code	CN code
Driver	Remote power kit - 60 W	1A4170000.19.00	-	-
Driver	Remote power kit - 150 W	1A2810000.11.00	-	-

## COLIBRÌ - System



Track 1 m Track 2 m Track 3 m	Matt white Matt black	
Power connector	Matt black	
Corner joint cover H	Matt white Matt black	
Corner joint cover V	Matt white Matt black	
End cap	Matt white Matt black	
Cover 3 m	Matt white Matt black	
Pendant gripper	Standard	
Pendant gripper screw	Standard	
Pendant short bracket	Matt white Matt black	
Pendant long bracket	Matt white Matt black	
L-joint	Matt black	
L-feed ceiling wall	Matt black	

Flexible joint	Matt black	
Joining connector	Matt black	
Locking tool for PVC	Standard	
Endless adapter	Standard	

## COLIBRÌ - Recessed system


Track 1 m Track 2 m Track 3 m	Matt black	
Power connector	Matt black	
End cap	Matt black	
Cover 1 m Cover 2 m Cover 3 m	Matt white Matt black	
Template for track	Standard	

## Drivers

Driver	Remote power kit - 60 W	
Driver	Remote power kit - 150 W	

## COLIBRI - System


Accessories	Global code	US code	CN code
Track 1 m - Matt white	1A4170300.01.00	-	-
Track 1 m - Matt black	1A4170400.01.00	-	-
Track 2 m - Matt white	1A4170300.02.00	-	-
Track 2 m - Matt black	1A4170400.02.00	-	-
Track 3 m - Matt white	1A4170300.03.00	-	-
Track 3 m - Matt black	1A4170400.03.00	-	-
Power connector - Matt black	1A4170400.04.00	-	-
Corner joint cover H - Matt white	1A4170300.05.00	-	-
Corner joint cover H - Matt black	1A4170400.05.00	-	-
Corner joint cover V - Matt white	1A4170300.06.00	-	-
Corner joint cover V - Matt black	1A4170400.06.00	-	-
End cap - Matt white	1A4170300.07.00	-	-
End cap - Matt black	1A4170400.07.00	-	-
Cover 3 m - Matt white	1A4170300.08.00	-	-
Cover 3 m - Matt black	1A4170400.08.00	-	-
Pendant gripper	1A4170000.09.00	-	-
Pendant gripper screw	1A4170000.10.00	-	-
Pendant short bracket - Matt white	1A4170300.11.00	-	-
Pendant short bracket - Matt black	1A4170400.11.00	-	-
Pendant long bracket - Matt white	1A4170300.12.00	-	-
Pendant long bracket - Matt black	1A4170400.12.00	-	-
L-joint - Matt black	1A4170400.13.00	-	-
L-feed ceiling wall - Matt black	1A4170400.14.00	-	-
Flexible joint - Matt black	1A4170400.15.00	-	-
Jointing connector - Matt black	1A4170400.16.00	-	-
Locking tool for PVC	1A4170000.17.00	-	-
Endless adapter	1A4170000.20.00	-	-

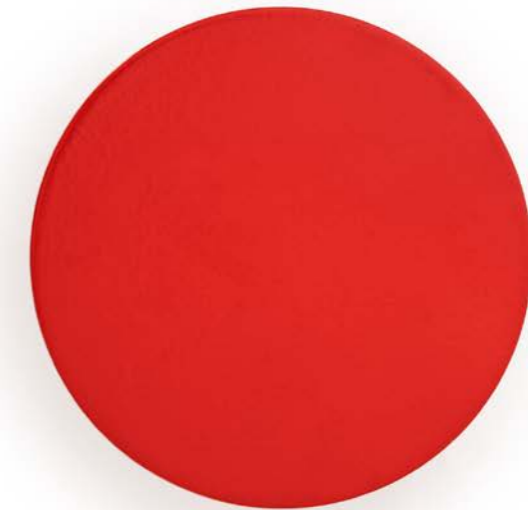

COLIBRI

## COLIBRÌ - Recessed system

Accessories	Global code	US code	CN code
Track 1 m - Matt black	1A4180400.01.00	-	-
Track 2 m - Matt black	1A4180400.02.00	-	-
Track 3 m - Matt black	1A4180400.03.00	-	-
Power connector - Matt black	1A4180400.04.00	-	-
End cap - Matt black	1A4180400.05.00	-	-
Cover 1 m - Matt white	1A4180300.06.00	-	-
Cover 1 m - Matt black	1A4180400.06.00	-	-
Cover 2 m - Matt white	1A4180300.07.00	-	-
Cover 2 m - Matt black	1A4180400.07.00	-	-
Cover 3 m - Matt white	1A4180300.08.00	-	-
Cover 3 m - Matt black	1A4180400.08.00	-	-
Template for track	1A4180000.09.00	-	-

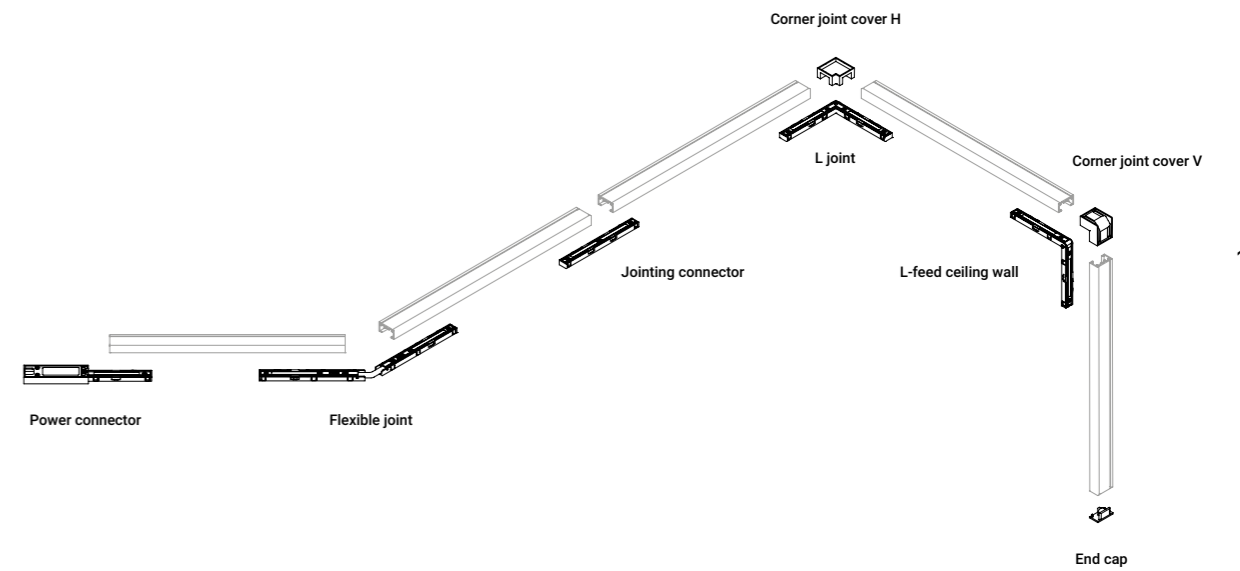

COLIBRÌ

Da sempre ci piace pensare in modo eretico, evocando mistero, magia e seduzione.

In questo caso, la lente non è usata per focalizzare, ma per modificare la visione e la percezione dell'oggetto.

L'effetto della lente convessa permette di celare la parte di emissione della luce e produrre un leggerissimo effetto di sospensione e inconsistenza.

La luce e la trasparenza sono le vere protagoniste di questo progetto.

We have always liked to think heretically, evoking mystery, magic and seduction.


In this case, the lens is not used to focus, but to modify the vision and perception of the object.

The effect of the convex lens conceals the part of the light beam and produces the lightest effect of suspension and inconsistency.

Light and transparency are the true stars of this project.

## MAGIA

Michele Groppi, 2023

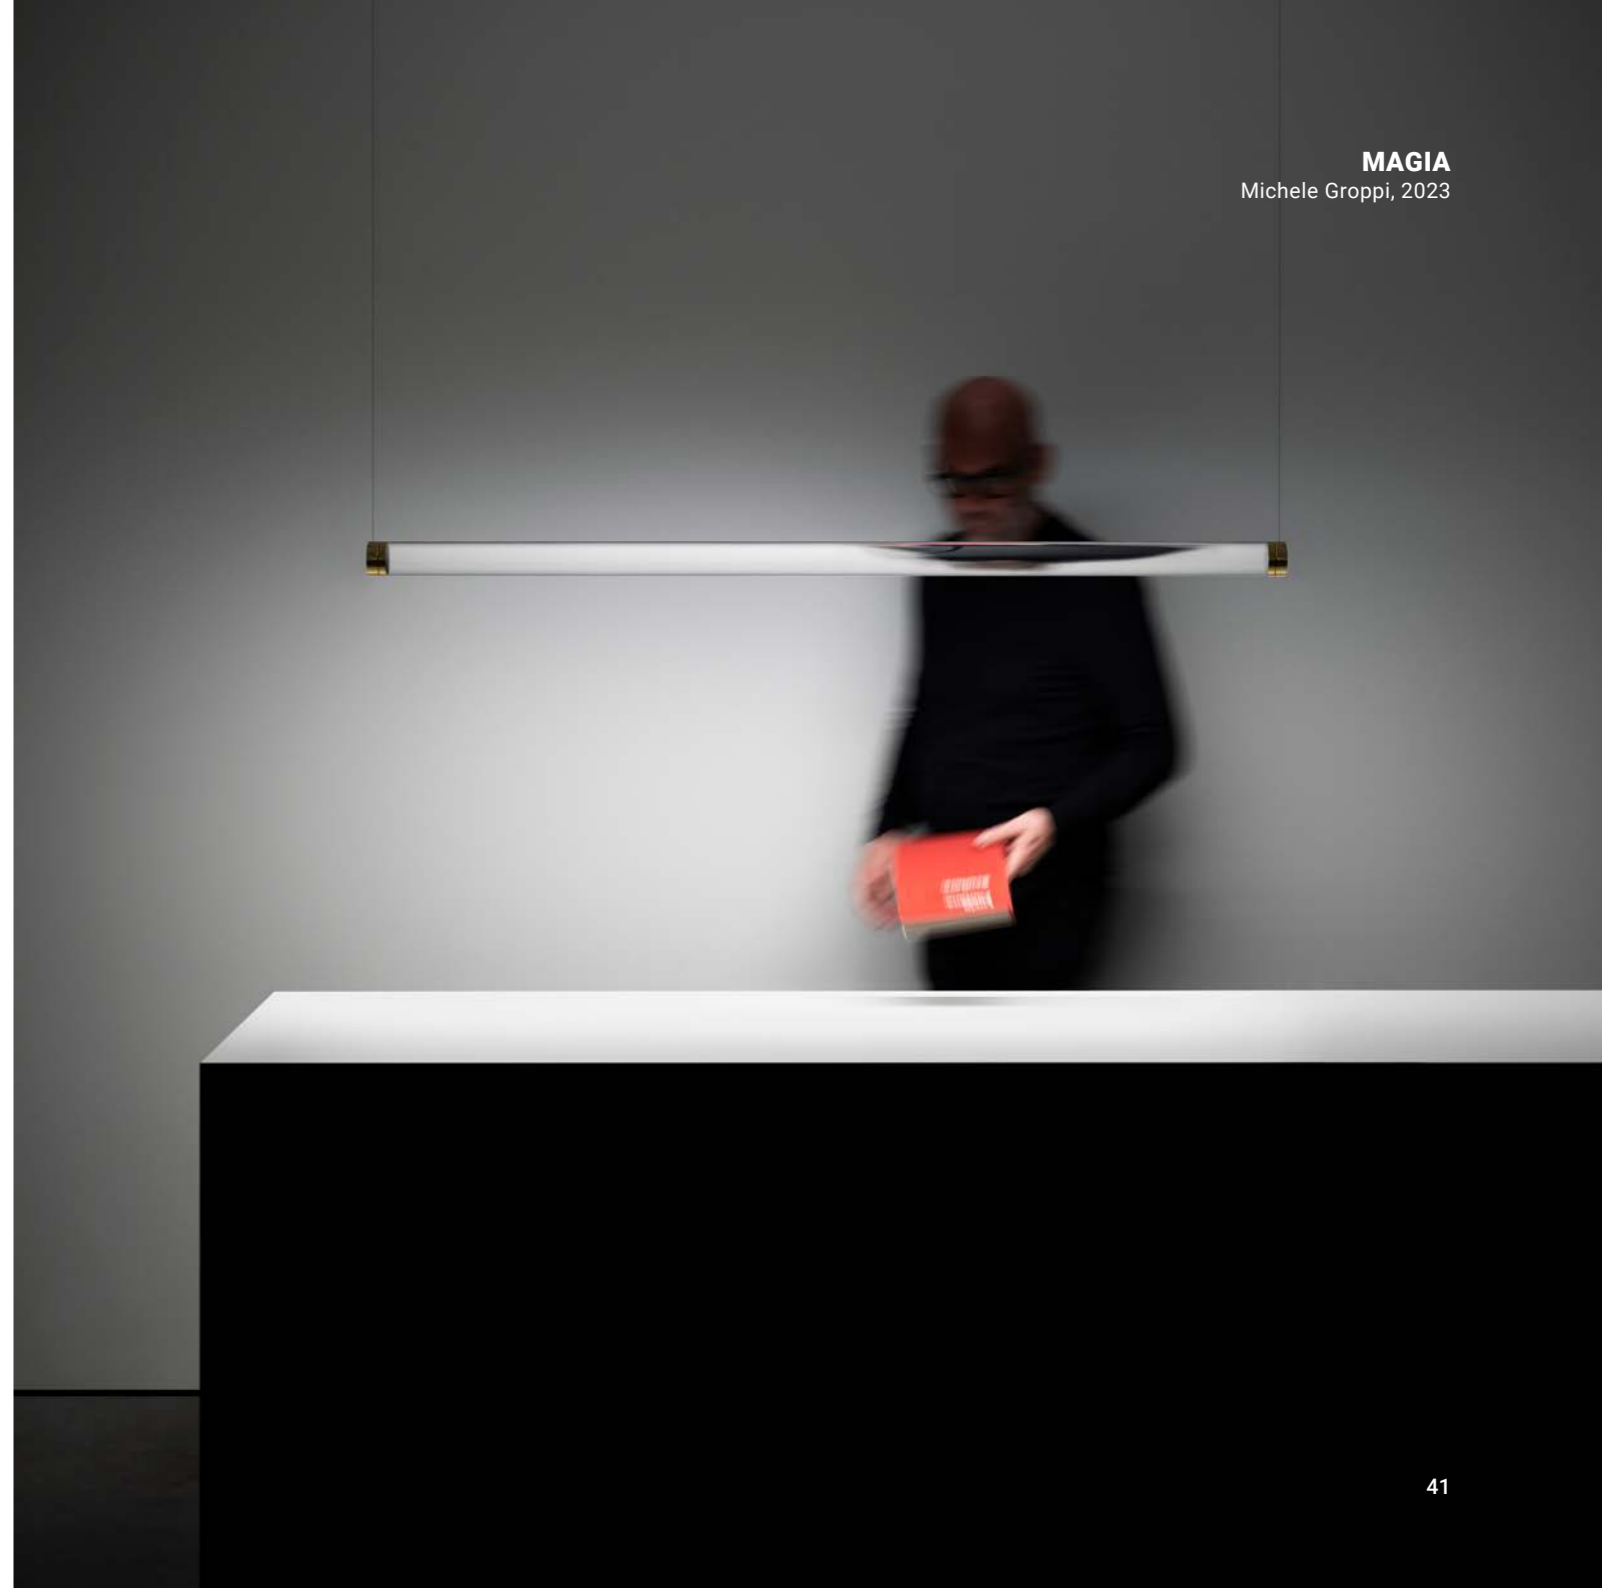

## MAGIA

MAGIA 1 not available for CN market.

Finish	Polished gold Polished black chrome
Mounting	Suspension
Environment	Indoor
CCT- System flux	2700K ~ 1770 lm 3000K ~ 1950 lm
CRI	90
Configuration	Max 3 modules

### MAGIA 1




Insulation class	I
Frequency	50/60 Hz
Main voltage	110-240 V
Power	22 W LED
Driver	Integrated
Dimming type	DALI - PUSH - 1-10 V - TRIAC*

### MAGIA 2

Insulation class	III
Main voltage	24 V DC
Power	19 W LED
Driver	Remote
Remote dimming type	DALI - PUSH - 1-10 V - TRIAC

\*TRIAC version not available for US market

CE IP20

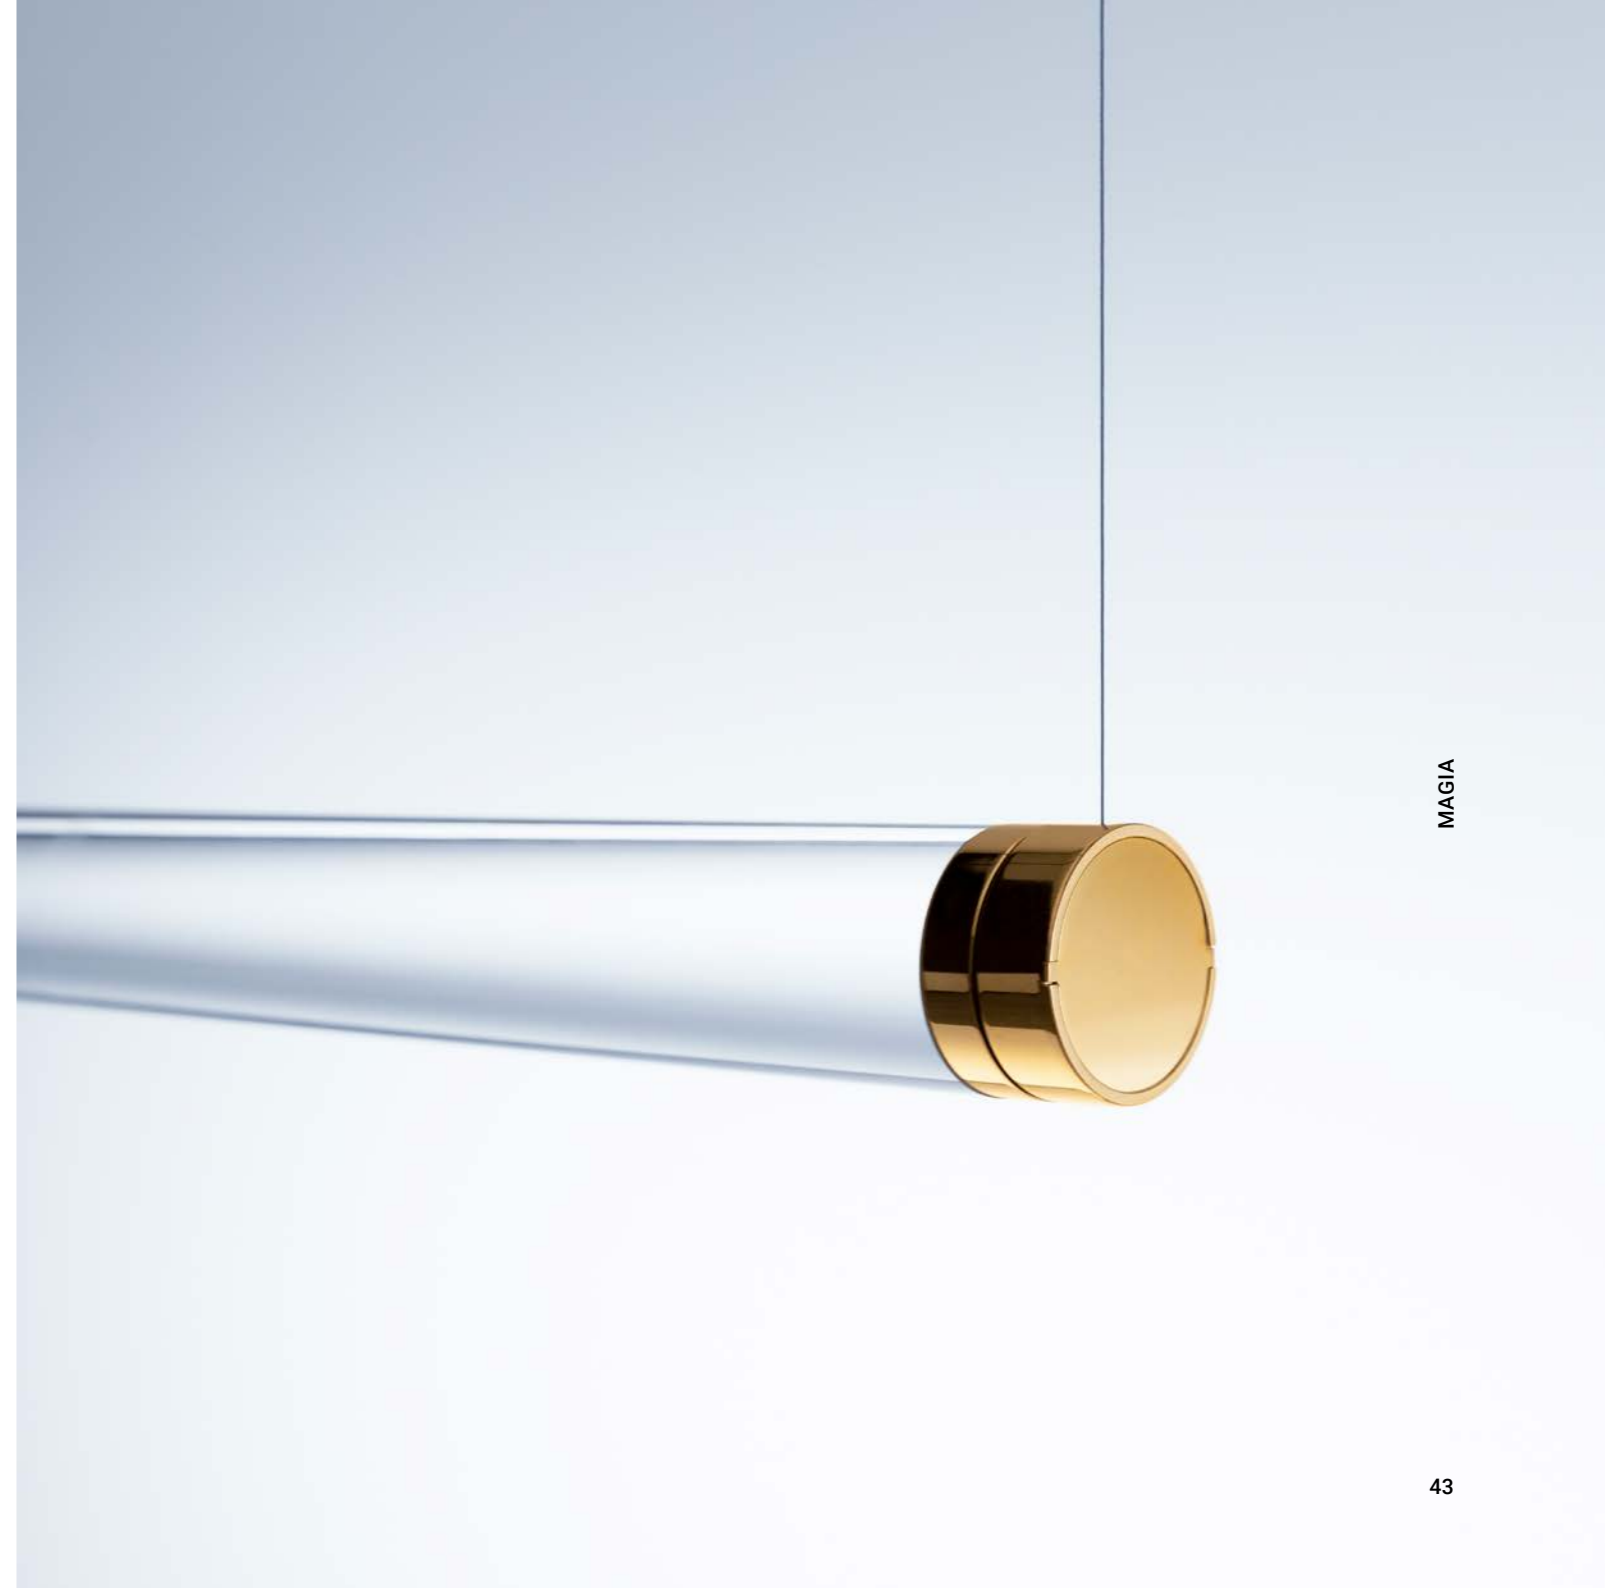

MAGIA


## MAGIA

		Global code	US code	CN code
Magia 1 - Polished gold	2700K - DALI - PUSH - 1-10 V - TRIAC	1A4201900.27.05	-	-
Magia 1 - Polished gold	3000K - DALI - PUSH - 1-10 V - TRIAC	1A4201900.30.05	-	-
Magia 1 - Polished black chrome	2700K - DALI - PUSH - 1-10 V - TRIAC	1A4202800.27.05	-	-
Magia 1 - Polished black chrome	3000K - DALI - PUSH - 1-10 V - TRIAC	1A4202800.30.05	-	-
Magia 1 - Polished gold	2700K - DALI - PUSH - 1-10 V	-	1A4201903.27.07	-
Magia 1 - Polished gold	3000K - DALI - PUSH - 1-10 V	-	1A4201903.30.07	-
Magia 1 - Polished black chrome	2700K - DALI - PUSH - 1-10 V	-	1A4202803.27.07	-
Magia 1 - Polished black chrome	3000K - DALI - PUSH - 1-10 V	-	1A4202803.30.07	-
Magia 2 - Polished gold	2700K - CLIII	1A4201900.27.20	1A4201903.27.20	1A4201908.27.20
Magia 2 - Polished gold	3000K - CLIII	1A4201900.30.20	1A4201903.30.20	1A4201908.30.20
Magia 2 - Polished black chrome	2700K - CLIII	1A4202800.27.20	1A4202803.27.20	1A4202808.27.20
Magia 2 - Polished black chrome	3000K - CLIII	1A4202800.30.20	1A4202803.30.20	1A4202808.30.20


Electrical power supply		Global code	US code	CN code
Magia 2 - Driver	24 V - 80 W - IP20 - ON-OFF	1Z1120440	1Z1120440	1Z1120440
Magia 2 - Controller	DALI - PUSH - PHASE CUT - 1-10 V	1Z2170010	1Z0000034	1Z0000034

Accessories		Global code	US code	CN code
Tube - Polished gold	2700K - CLIII	1A4511900.27.20	1A4511903.27.20	1A4511908.27.20
Tube - Polished gold	3000K - CLIII	1A4511900.30.20	1A4511903.30.20	1A4511908.30.20
Tube - Polished black chrome	2700K - CLIII	1A4512800.27.20	1A4512803.27.20	1A4512808.27.20
Tube - Polished black chrome	3000K - CLIII	1A4512800.30.20	1A4512803.30.20	1A4512808.30.20
Magia 1 - Wire guide - Matt black		1A3040400.00.00	1A3040403.00.00	-
Magia 2 - Ceiling rose - Matt white		1A4650300.00.00	1A4650300.00.00	1A4650300.00.00

Possibility to instal up to 3 modules

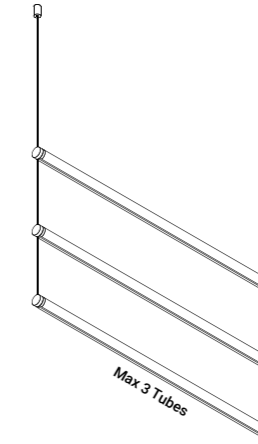

Possibility to rotate the module at 360°

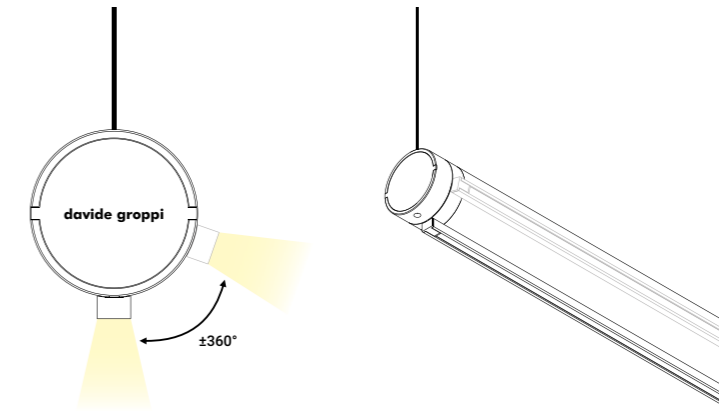

MAGIA


Una lama di luce spessa solo 6 millimetri, espressione di una parte del nostro pensiero, quello più puro ed essenziale.

La sorpresa di una lampada estremamente sottile ma al contempo molto luminosa, elemento di progetto razionale e funzionale.

A blade of light just 6 millimetres thick, the expression of that purest and most essential part of our thought.

The surprise of an extremely thin, yet at the same time very bright, lamp, an element of a rational, functional project.

**SOTTILE**  
Davide Groppi, 2023

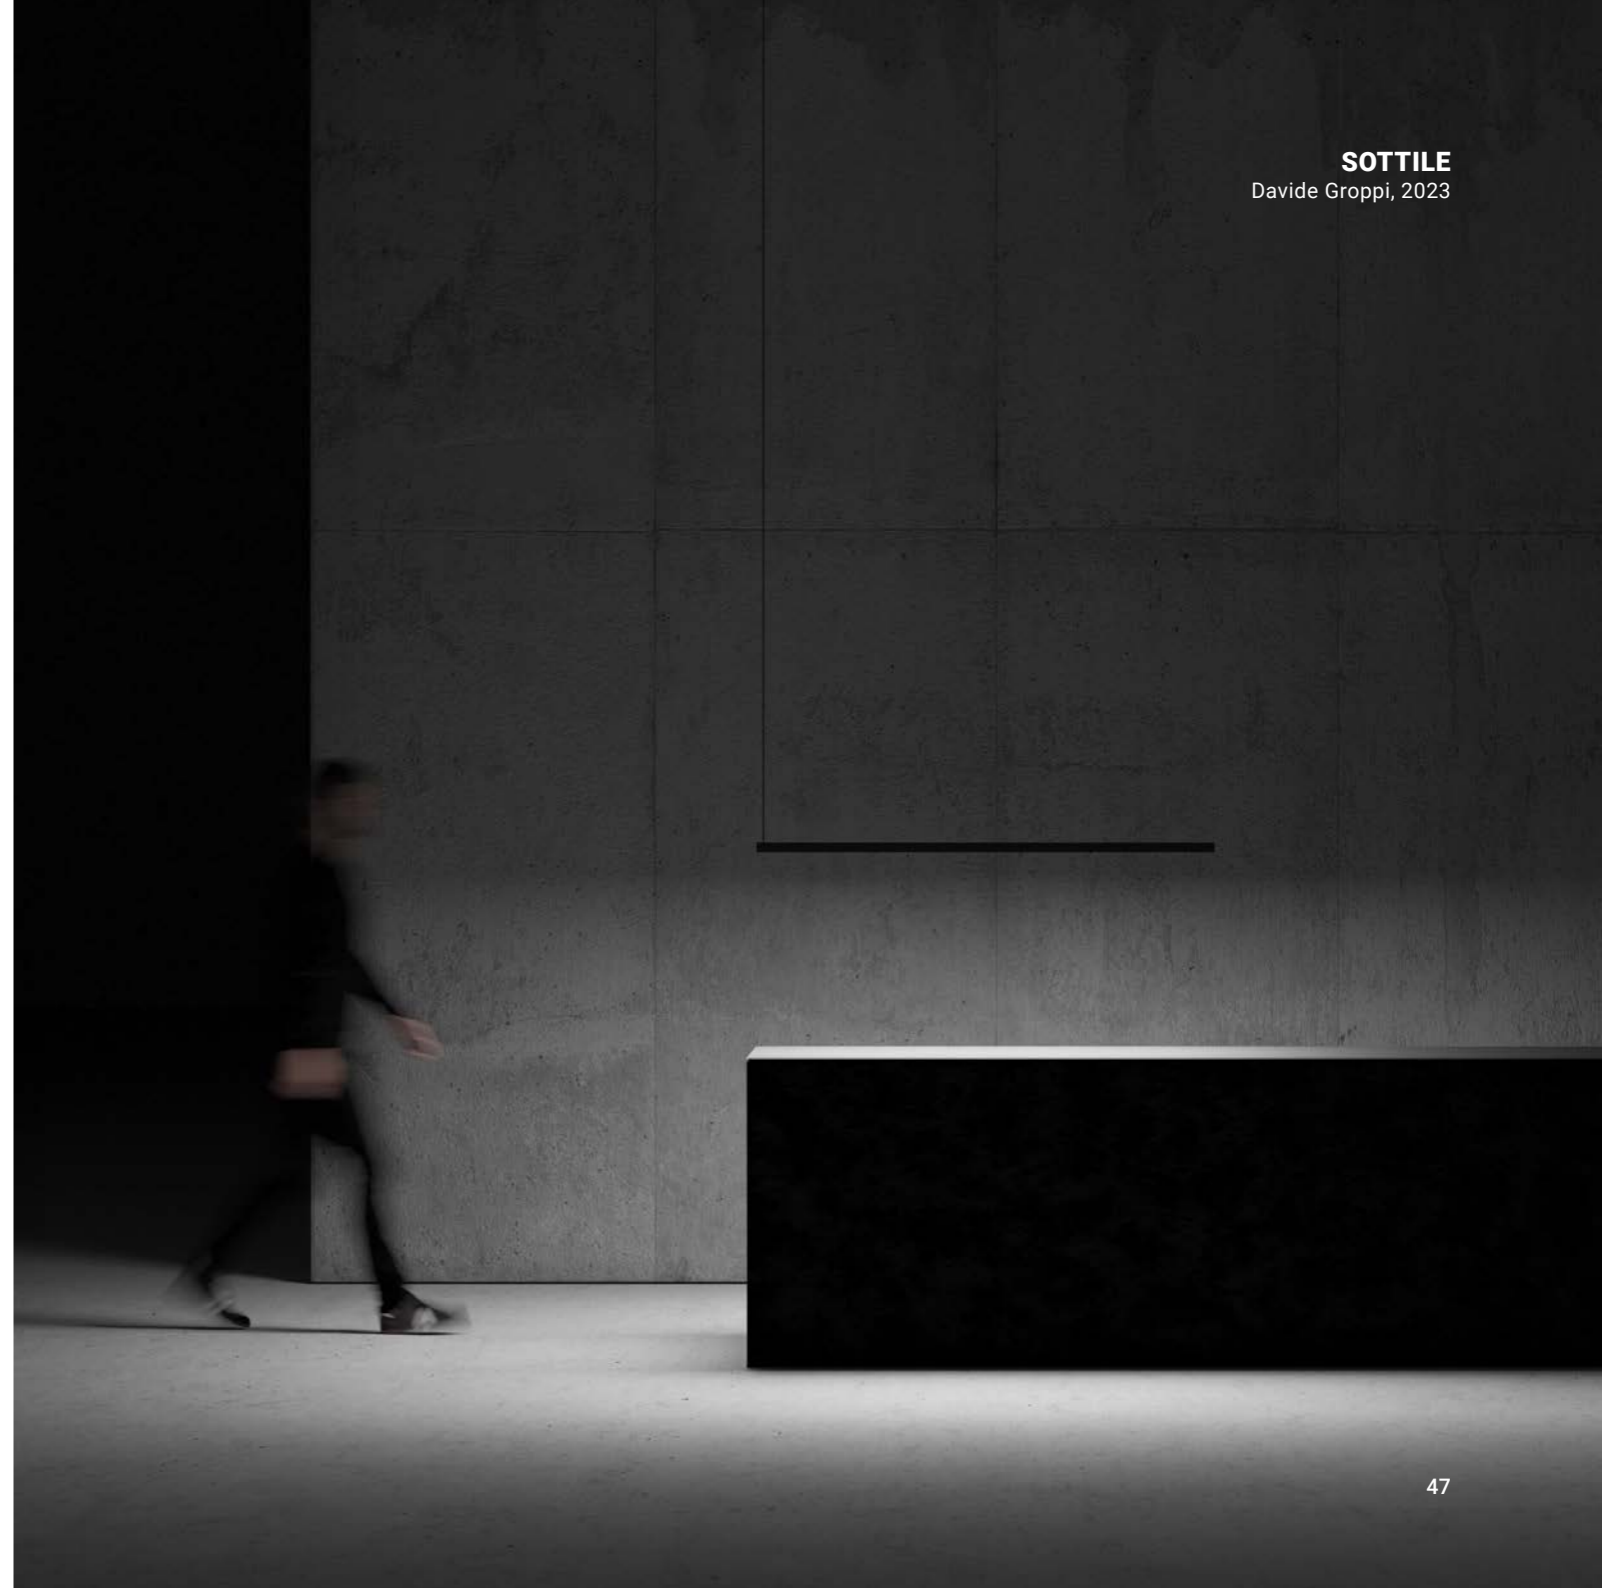



## SOTTILE

SOTTILE 1 not available for CN market.

Finish	Matt white Matt black Brushed champagne Brushed black chrome
Mounting	Suspension
Environment	Indoor
CCT- System flux	2700K ~ 1300 lm 3000K ~ 1400 lm
CRI	80

### SOTTILE 1




Insulation class	I
Frequency	50/60 Hz
Main voltage	110-240 V
Power	26 W LED
Driver	Integrated
Dimming type	DALI - PUSH - 1-10 V - TRIAC*

### SOTTILE 2

Insulation class	III
Main voltage	24 V DC
Power	22 W LED
Driver	Remote
Remote dimming type	DALI - PUSH - 1-10 V - TRIAC

\*TRIAC version not available for US market

CE IP20

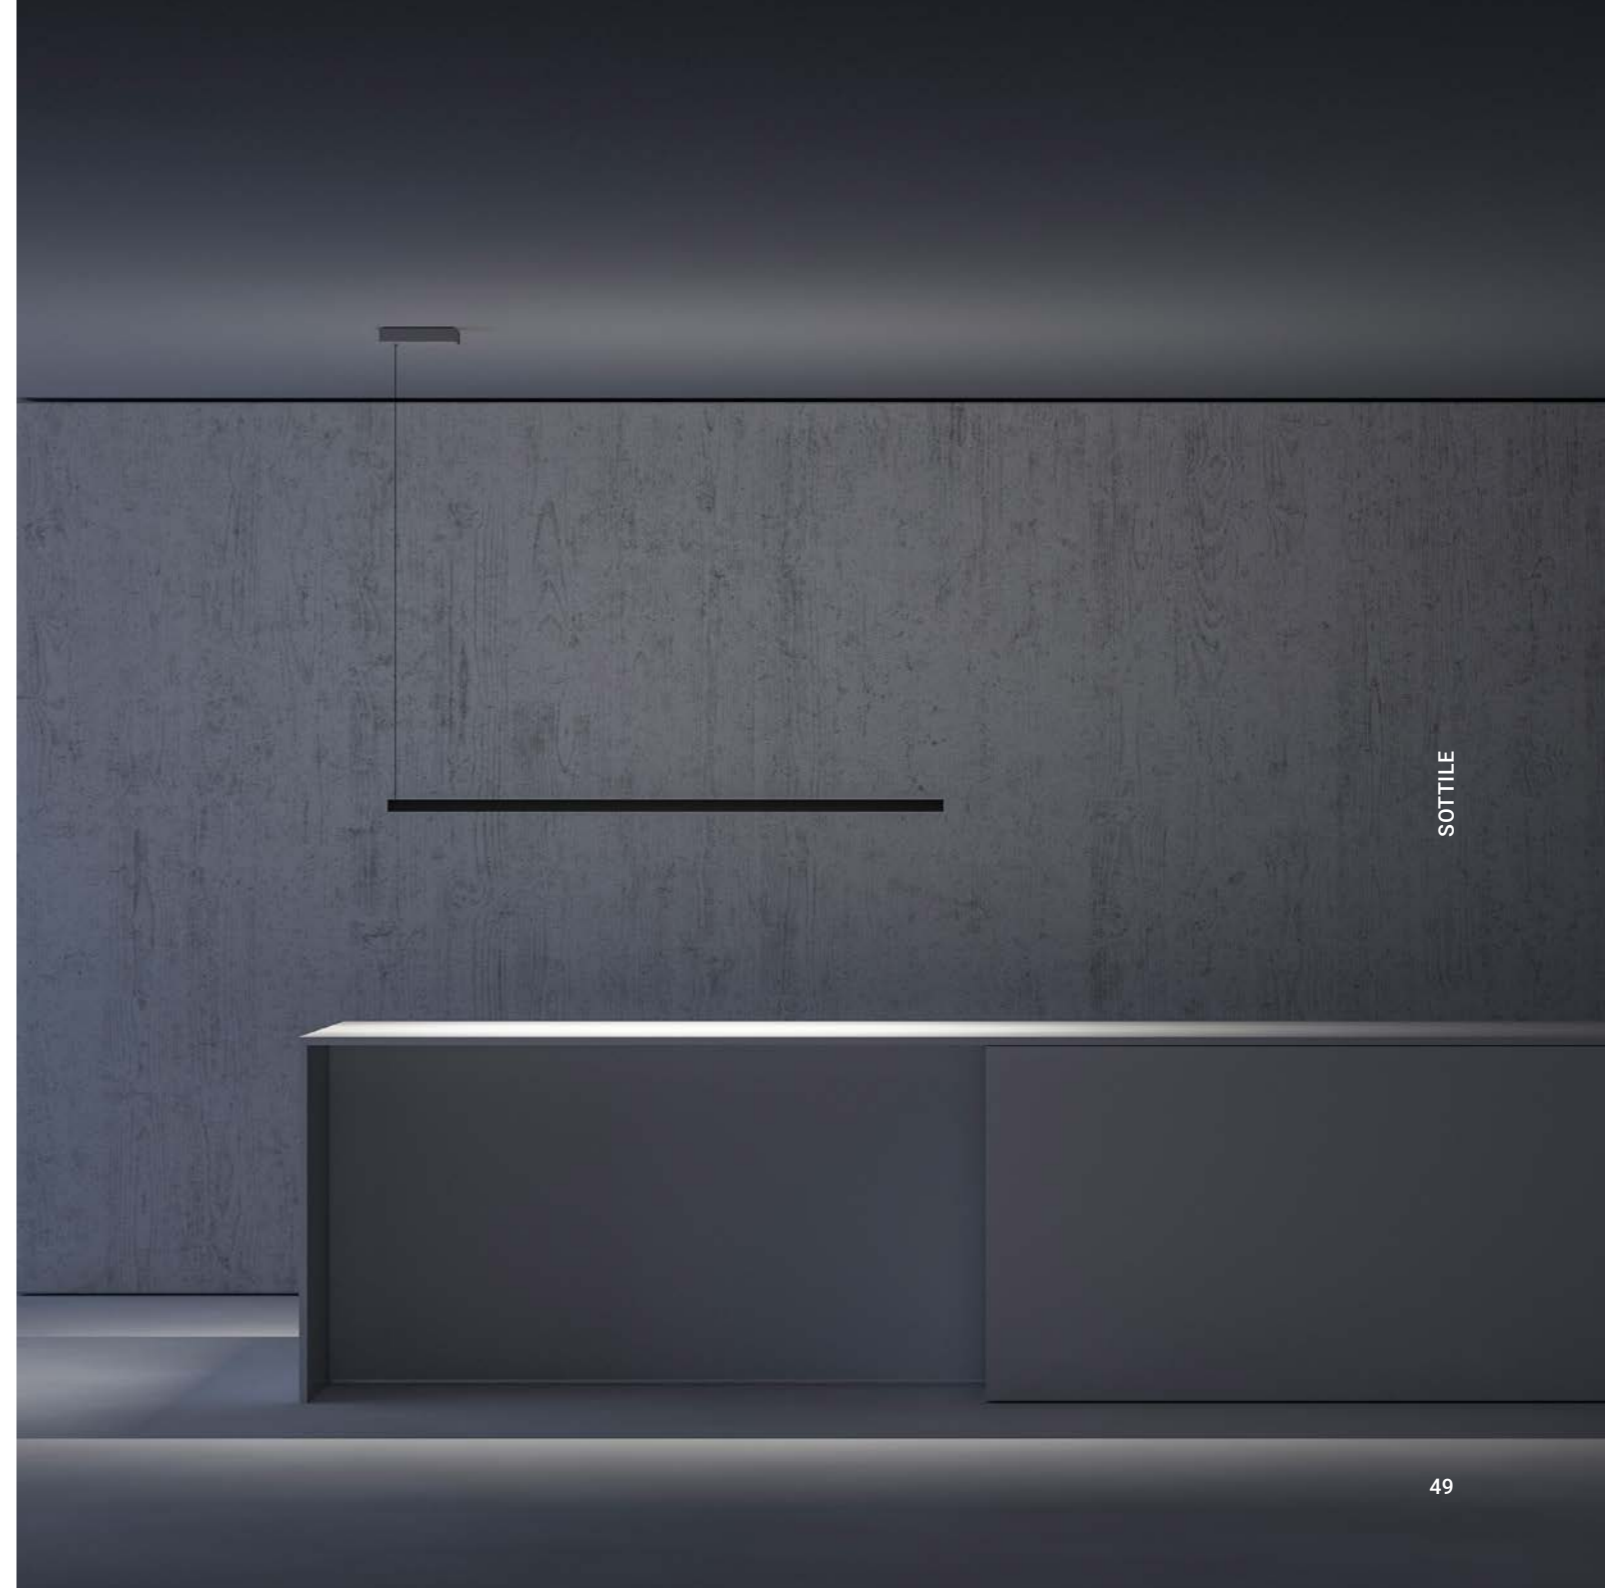

SOTTILE

## SOTTILE

		Global code	US code	CN code
Sottile 1 - Matt white	2700K - DALI - PUSH - 1-10 V - TRIAC	1A4230300.27.05	-	-
Sottile 1 - Matt white	3000K - DALI - PUSH - 1-10 V - TRIAC	1A4230300.30.05	-	-
Sottile 1 - Matt black	2700K - DALI - PUSH - 1-10 V - TRIAC	1A4230400.27.05	-	-
Sottile 1 - Matt black	3000K - DALI - PUSH - 1-10 V - TRIAC	1A4230400.30.05	-	-
Sottile 1 - Brushed champagne	2700K - DALI - PUSH - 1-10 V - TRIAC	1A4232900.27.05	-	-
Sottile 1 - Brushed champagne	3000K - DALI - PUSH - 1-10 V - TRIAC	1A4232900.30.05	-	-
Sottile 1 - Brushed black chrome	2700K - DALI - PUSH - 1-10 V - TRIAC	1A4233600.27.05	-	-
Sottile 1 - Brushed black chrome	3000K - DALI - PUSH - 1-10 V - TRIAC	1A4233600.30.05	-	-
Sottile 1 - Matt white	2700K - DALI - PUSH - 1-10 V	-	1A4230303.27.07	-
Sottile 1 - Matt white	3000K - DALI - PUSH - 1-10 V	-	1A4230303.30.07	-
Sottile 1 - Matt black	2700K - DALI - PUSH - 1-10 V	-	1A4230403.27.07	-
Sottile 1 - Matt black	3000K - DALI - PUSH - 1-10 V	-	1A4230403.30.07	-
Sottile 1 - Brushed champagne	2700K - DALI - PUSH - 1-10 V	-	1A4232903.27.07	-
Sottile 1 - Brushed champagne	3000K - DALI - PUSH - 1-10 V	-	1A4232903.30.07	-
Sottile 1 - Brushed black chrome	2700K - DALI - PUSH - 1-10 V	-	1A4233603.27.07	-
Sottile 1 - Brushed black chrome	3000K - DALI - PUSH - 1-10 V	-	1A4233603.30.07	-
Sottile 2 - Matt white	2700K - CLIII	1A4230300.27.20	1A4230303.27.20	1A4230308.27.20
Sottile 2 - Matt white	3000K - CLIII	1A4230300.30.20	1A4230303.30.20	1A4230308.30.20
Sottile 2 - Matt black	2700K - CLIII	1A4230400.27.20	1A4230403.27.20	1A4230408.27.20
Sottile 2 - Matt black	3000K - CLIII	1A4230400.30.20	1A4230403.30.20	1A4230408.30.20
Sottile 2 - Brushed champagne	2700K - CLIII	1A4232900.27.20	1A4232903.27.20	1A4232908.27.20
Sottile 2 - Brushed champagne	3000K - CLIII	1A4232900.30.20	1A4232903.30.20	1A4232908.30.20
Sottile 2 - Brushed black chrome	2700K - CLIII	1A4233600.27.20	1A4233603.27.20	1A4233608.27.20
Sottile 2 - Brushed black chrome	3000K - CLIII	1A4233600.30.20	1A4233603.30.20	1A4233608.30.20
Electrical power supply		Global code	US code	CN code
Sottile 2 - Driver	24 V - 50 W - IP20 - ON-OFF	1Z1120490	1Z1120490	1Z1120490
Sottile 2 - Controller	DALI - PUSH - PHASE CUT - 1-10 V	1Z2170010	1Z0000034	1Z0000034
Accessories		Global code	US code	CN code
Sottile 2 - Ceiling rose - Matt white		1A4640300.00.00	1A4640300.00.00	1A4640300.00.00



SOTTILE

La purezza del cono sospeso racchiude una piccola macchina di luce che produce contemporaneamente luce diretta, indiretta e diffusa. Sopra al tavolo, Sottosopra: pura, elegante, meravigliosamente efficiente.

The purity of the suspended cone encases a small light machine that produces direct, indirect and diffused light at the same time. Above the table, Sottosopra: pure, elegant, wonderfully efficient.

**SOTTOSOPRA**  
Davide Groppi, 2023



## SOTTOSOPRA

Dual emission and double switch lamp.  
SOTTOSOPRA 1 not available for CN market.

Finish	Matt white Matt black D-Greige
Mounting	Suspension
Environment	Indoor
CCT- System flux	2700K ~ 228 lm (down) - 1827 lm (up) 3000K ~ 245 lm (down) - 1876 lm (up)
CRI	>90 (down) - >80 (up)



### SOTTOSOPRA 1

Insulation class	I
Frequency	50/60 Hz
Main voltage	110-240 V
Power	30 W LED
Driver	Integrated
Dimming type	DALI - PUSH - 1-10 V

### SOTTOSOPRA 2

Insulation class	III
Main voltage	500 mA DC
Power	30 W LED
Driver	Remote power kit
Remote dimming type	DALI - PUSH - 1-10 V

CE  IP20



SOTTOSOPRA

## SOTTOSOPRA

		Global code	US code	CN code
Sottosopra 1 - Matt white	2700K - DALI - PUSH - 1-10 V	1A4540300.27.07	1A4540303.27.07	-
Sottosopra 1 - Matt white	3000K - DALI - PUSH - 1-10 V	1A4540300.30.07	1A4540303.30.07	-
Sottosopra 1 - Matt black	2700K - DALI - PUSH - 1-10 V	1A4540400.27.07	1A4540403.27.07	
Sottosopra 1 - Matt black	3000K - DALI - PUSH - 1-10 V	1A4540400.30.07	1A4540403.30.07	
Sottosopra 1 - D-Greige	2700K - DALI - PUSH - 1-10 V	1A4543500.27.07	1A4543503.27.07	-
Sottosopra 1 - D-Greige	3000K - DALI - PUSH - 1-10 V	1A4543500.30.07	1A4543503.30.07	-
Sottosopra 2 - Matt white	2700K - CLIII	1A4540300.27.20	1A4540303.27.20	1A4540308.27.20
Sottosopra 2 - Matt white	3000K - CLIII	1A4540300.30.20	1A4540303.30.20	1A4540308.30.20
Sottosopra 2 - Matt black	2700K - CLIII	1A4540400.27.20	1A4540403.27.20	1A4540408.27.20
Sottosopra 2 - Matt black	3000K - CLIII	1A4540400.30.20	1A4540403.30.20	1A4540408.30.20
Sottosopra 2 - D-Greige	2700K - CLIII	1A4543500.27.20	1A4543503.27.20	1A4543508.27.20
Sottosopra 2 - D-Greige	3000K - CLIII	1A4543500.30.20	1A4543503.30.20	1A4543508.30.20
Electrical power supply		Global code	US code	CN code
Sottosopra 2 - Driver	Remote power kit	1A4620000.00.07	1A4620003.00.07	1A4620008.00.07



SOTTOSOPRA

Del classico lampadario in cristallo abbiamo salvato le gocce, grandi, scintillanti, sospese nel vuoto.

Una piccola macchina luminosa, con luce diretta e indiretta, moltiplica i riflessi del cristallo creando un meraviglioso effetto di magnificenza, trasposizione contemporanea di Versailles.

From the classic crystal chandelier, we saved the drops, those large, sparkling drops hanging in the air.

A small light machine, with direct and indirect light, multiplies the glass reflections to create a wonderful effect of magnificence, the contemporary transposition of Versailles.

**LOUIS XIV**  
Davide Groppi, 2023



## LOUIS XIV (ricordo di un lampadario a gocce)

Dual emission and double switch lamp.  
LOUIS XVI 1 not available for CN market.

Finish	Polished gold
Mounting	Suspension
Environment	Indoor
CCT- System flux	2700K ~ 228 lm (down) - 616 lm (up) 3000K ~ 245 lm (down) - 716 lm (up)
CRI	>90



### LOUIS XIV 1

Insulation class	I
Frequency	50/60 Hz
Main voltage	110-240 V
Power	14 W LED
Driver	Integrated
Dimming type	DALI - PUSH - 1-10 V

### LOUIS XIV 2

Insulation class	III
Main voltage	500 mA DC
Power	14 W LED
Driver	Remote power kit
Remote dimming type	DALI - PUSH - 1-10 V

CE IP20



LOUIS XIV




## LOUIS XIV (ricordo di un lampadario a gocce)

		Global code	US code	CN code
Louis XIV 1 - Polished gold	2700K - DALI - PUSH - 1-10 V	1A4361900.27.07	1A4361903.27.07	1A4361908.27.07
Louis XIV 1 - Polished gold	3000K - DALI - PUSH - 1-10 V	1A4361900.30.07	1A4361903.30.07	1A4361908.30.07
Louis XIV 2 - Polished gold	2700K - CLIII	1A4361900.27.20	1A4361903.27.20	1A4361908.27.20
Louis XIV 2 - Polished gold	3000K - CLIII	1A4361900.30.20	1A4361903.30.20	1A4361908.30.20

Electrical power supply		Global code	US code	CN code
Louis XIV 2 - Driver	Remote power kit	1A4630000.00.07	1A4630003.00.07	1A4630008.00.07

Accessories		Global code	US code	CN code
Diamond - 10 drops		1A4580000.00.00	1A4580000.00.00	1A4580000.00.00

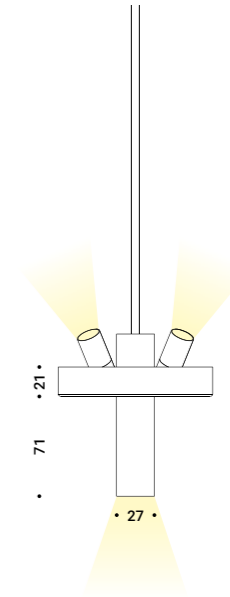

LOUIS XIV



A dieci anni dalla presentazione della nostra prima lampada a batteria, abbiamo voluto aggiungere un nuovo sguardo alla luce senza fili, rimanendo unici e innovativi.

Abbiamo pensato, ancora una volta, di togliere, cercando solo la luce. È nata una lampada trasparente, verità e bellezza.

Ten years after the presentation of our first battery lamp, we wanted to add a new idea of wireless light, remaining unique and innovative.

Once again, we decided to take away, seeking only the light.

A transparent lamp was born, truth and beauty.

**VIS À VIS**  
Michele Groppi, 2023




## VIS À VIS

Finish	Standard
Mounting	Table - Rechargeable
Environment	Indoor
CCT- System flux	2700K ~ 167 lm 3000K ~ 180 lm
CRI	>90

Insulation class	III
Main voltage	3,7 V DC
Power	2 W LED
LED current	4800 mAh
Battery life	9 hours
Battery type	Li-Poly
Charging socket	USB-C
Charger	Not included
Dimming type	Not dimmable

CE  IP20



VIS À VIS

## VIS À VIS

		Global code	US code	CN code
Vis à Vis	2700K - ON-OFF	1A4530000.27.00	1A4530003.27.00	1A4530008.27.00
Vis à Vis	3000K - ON-OFF	1A4530000.30.00	1A4530003.30.00	1A4530008.30.00

Accessories		Global code	US code	CN code
Power supply	2000 mA - 10 W - IP20 - ON-OFF	1Z0000088	1Z0000088	1Z0000088
USB to USB-C black cable		1Z0000070	1Z0000070	1Z0000070



Un progetto di molti anni fa, oggi rieditato in versione wireless.  
L'amore per il ready-made talvolta riaffiora, per soddisfare il mio desiderio  
profondo di disegnare il meno possibile, prendendo quello che c'è già.

A project from many years ago, today in a new wireless version.  
The love for the ready-made sometimes resurfaces, to satisfy my profound  
desire for designing as little as possible, taking what exists already.

**POST PRANDIUM**  
Davide Groppi, 2023





## POST PRANDIUM

Finish	Polished chrome
Mounting	Table - Rechargeable
Environment	Indoor
CCT- System flux	3000K ~ 180 lm
CRI	>90

Insulation class	III
Main voltage	3,7 V
Power	2 W LED
LED current	4800 mAh
Battery life	9 hours
Battery type	Li-Poly
Charging socket	USB-C
Charger	Not included
Dimming type	Not dimmable

CE  IP20

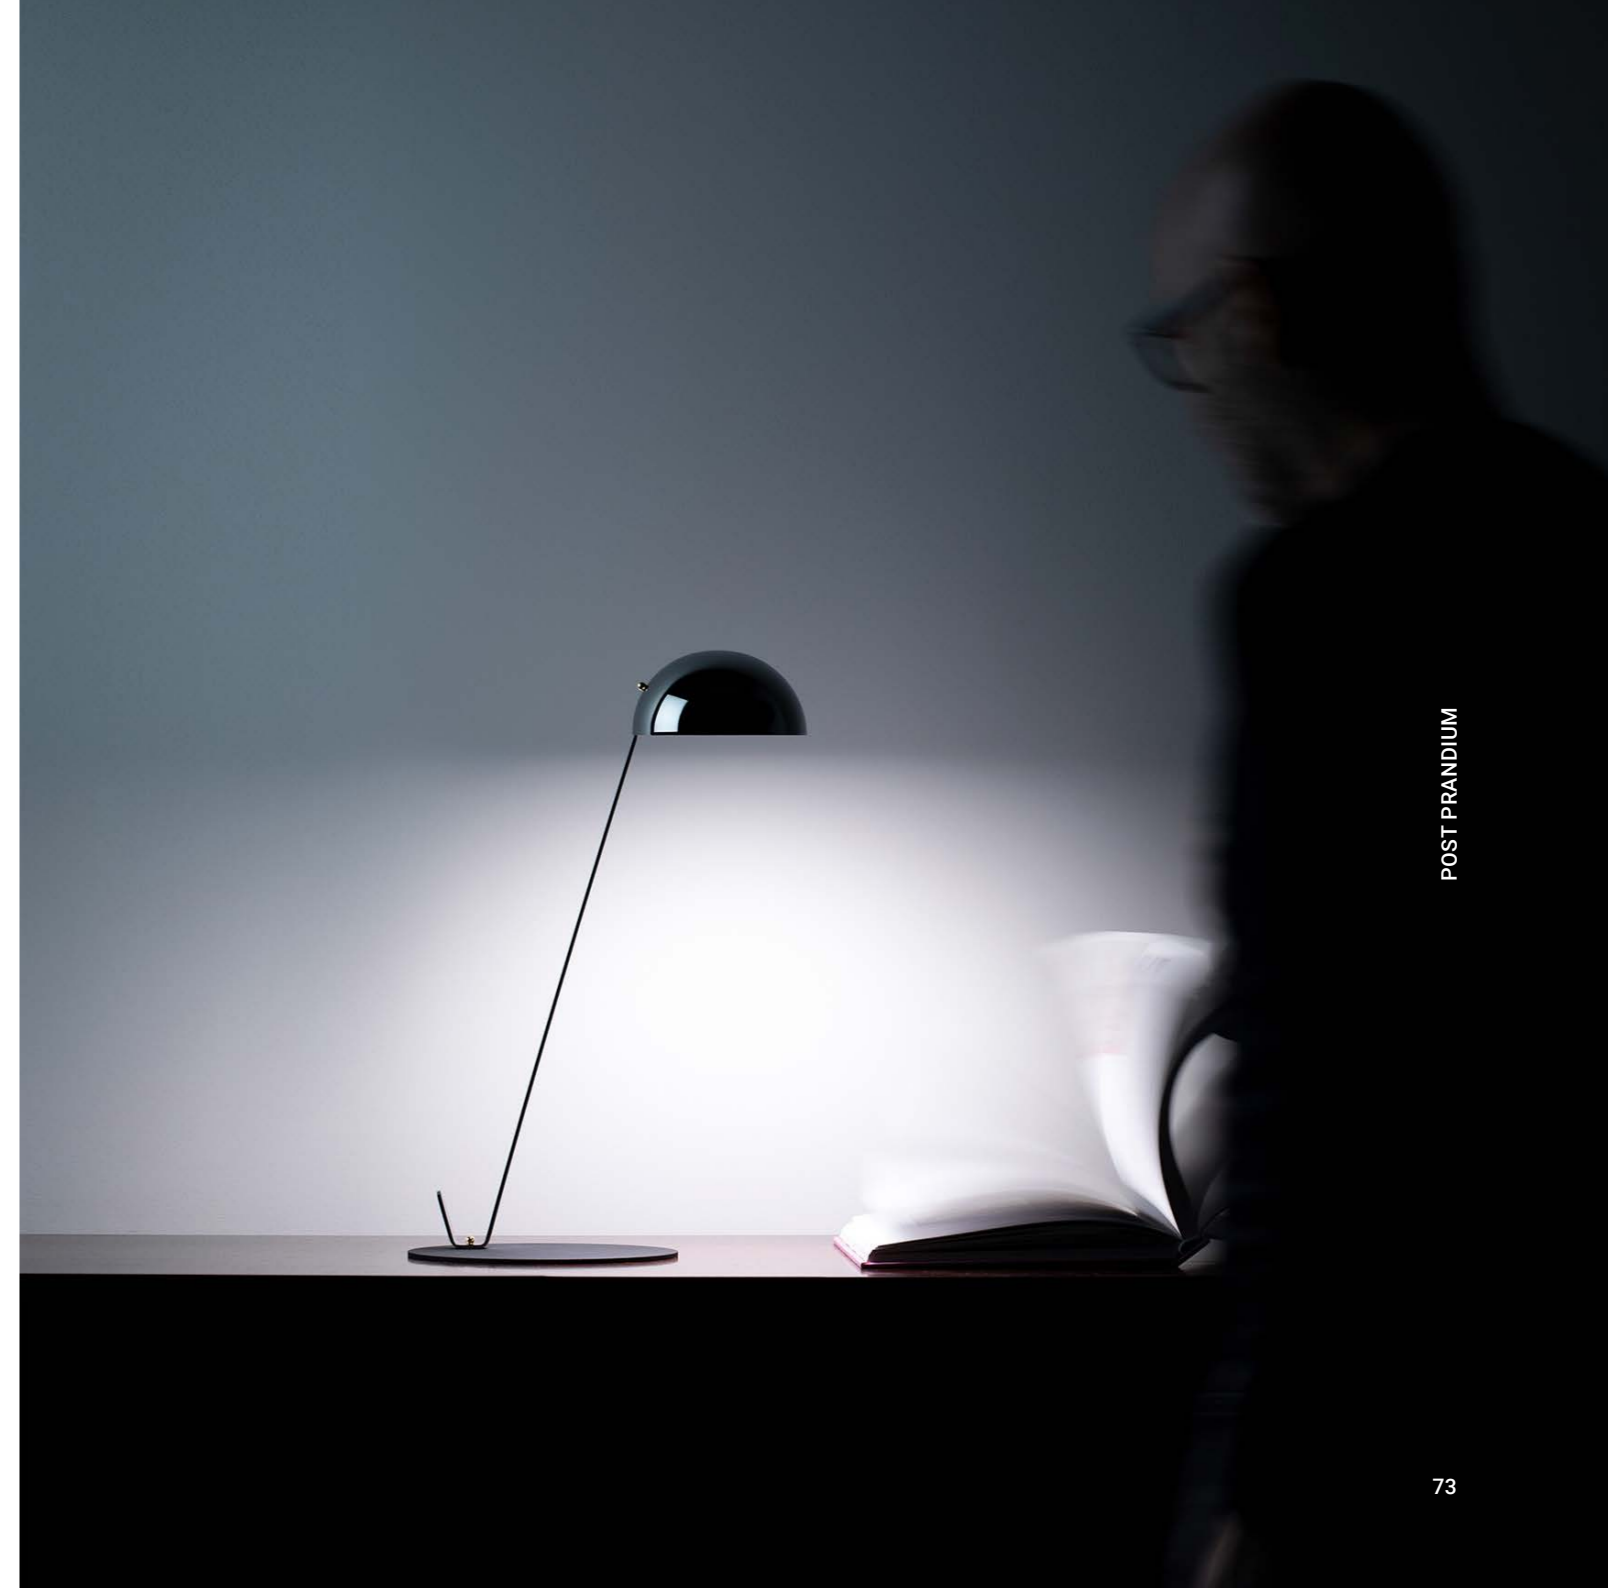

POST PRANDIUM

## POST PRANDIUM

		Global code	US code	CN code
Post Prandium - Polished chrome	3000K - ON-OFF	1A4550100.30.00	1A4550103.30.00	1A4550108.30.00
Accessories		Global code	US code	CN code
Power supply	2000 mA - 10 W - IP20 - ON-OFF	1Z0000088	1Z0000088	1Z0000088
USB to USB-C black cable		1Z0000070	1Z0000070	1Z0000070



Cinque cocodrilli si contendono la luce.

A volte devo lasciare correre la fantasia senza pensare se la lampada piacerà o se farà luce, in un esercizio creativo libero, dove gli aspetti compositivi e funzionali diventano secondari.

È il mio metodo per scoprire nuove forme di espressione, che portano a sorprese piacevoli, a scoperte inaspettate, a ricordi nostalgici. Just like a light, un omaggio a un punto di riferimento eterno.

Five crocodiles compete for the light.

Sometimes I have to let my imagination run without thinking if people will like the lamp or if it will create light, in a free, creative exercise where the compositional and functional aspects become secondary.

This is my way of discovering new forms of expression, which lead to pleasant surprises, unexpected discoveries, nostalgic memories. Just like a light, a homage to an eternal point of reference.

## JUST LIKE A LIGHT

Davide Groppi, 2023







## JUST LIKE A LIGHT (omaggio non dichiarato)

Lamp not available for US and CN market.

Finish	Standard
Mounting	Table
Environment	Indoor
<hr/>	
Insulation class	III
Frequency	50/60 Hz
Main voltage	110-240 V
Driver	Indipendent
Dimming type	Dimmer on board

CE  IP20

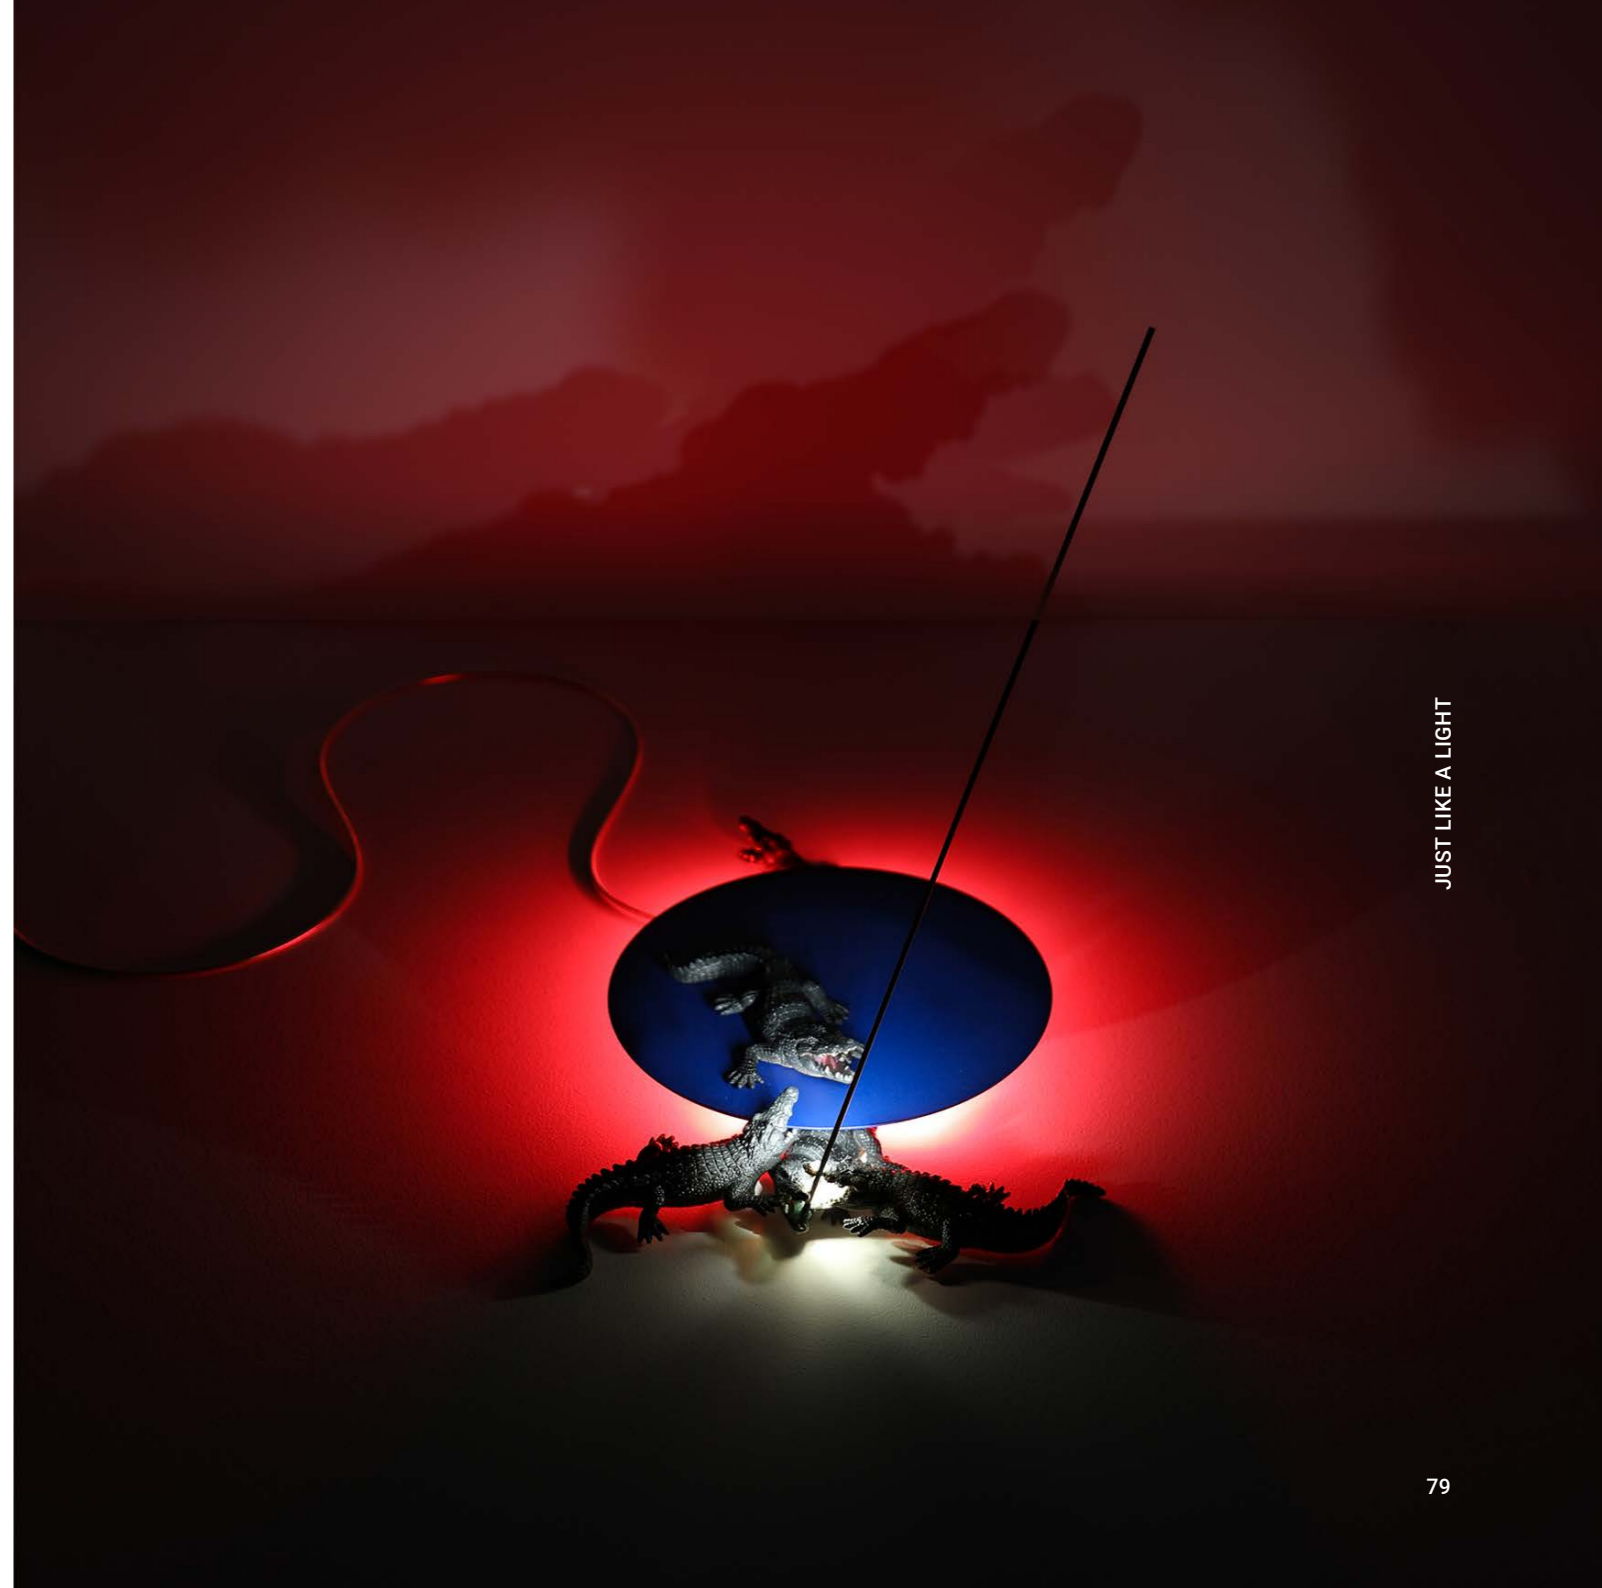


JUST LIKE A LIGHT



**JUST LIKE A LIGHT (omaggio non dichiarato)**

		Global code	US code	CN code
Just like a light	3000K - Dimmer on board	1A4560000.30.06	-	-

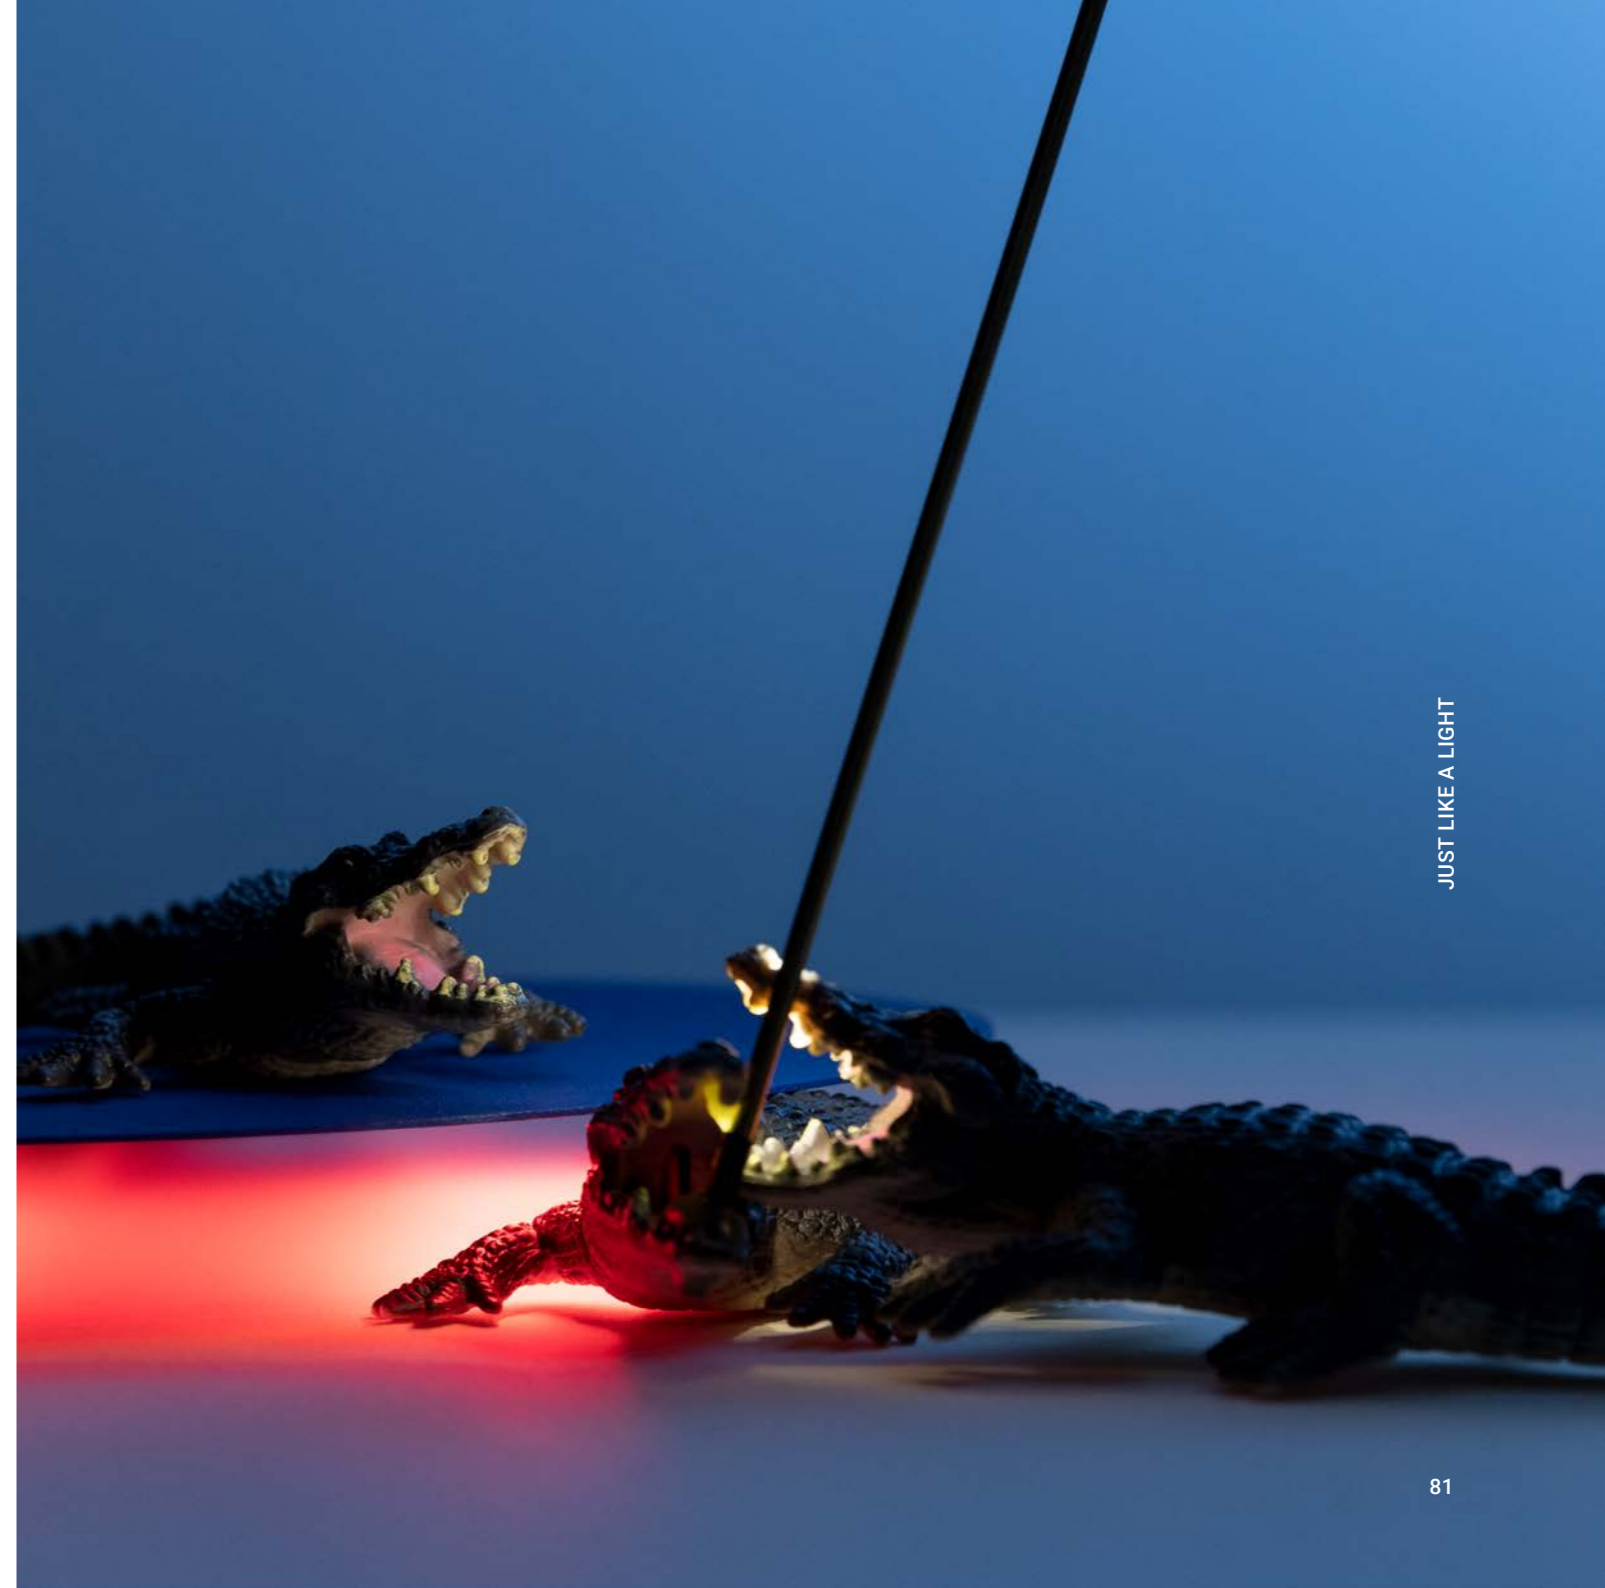

JUST LIKE A LIGHT

La notte è sempre fonte di ispirazione. Camminiamo e non siamo soli.  
Nuit è una piccola compagna di viaggio che disegna i nostri transiti  
notturni.


Night has always been a source of inspiration. We walk, and we are not alone.  
Nuit is a small travel companion that draws our night-time journeys.

**NUIT**  
Maurici Ginés, 2023



## NUIT

Finish	Matt white Gravity black Blasted blue Blasted inox
Mounting	Wall
Environment	Indoor / Outdoor
CCT- System flux	2700K ~ 45 lm 3000K ~ 50 lm
CRI	90
Insulation class	III
Main voltage	24 V DC
Power	1 W LED
Driver	Remote
Remote dimming type	Not dimmable



CE  IP65




# NUIT

		Global code	US code	CN code
Nuit - Matt white	2700K - CLIII	1A1320300.27.20	1A1320303.27.20	1A1320308.27.20
Nuit - Matt white	3000K - CLIII	1A1320300.30.20	1A1320303.30.20	1A1320308.30.20
Nuit - Gravity black	2700K - CLIII	1A1322700.27.20	1A1322703.27.20	1A1322708.27.20
Nuit - Gravity black	3000K - CLIII	1A1322700.30.20	1A1322703.30.20	1A1322708.30.20
Nuit - Blasted blue	2700K - CLIII	1A1323700.27.20	1A1323703.27.20	1A1323708.27.20
Nuit - Blasted blue	3000K - CLIII	1A1323700.30.20	1A1323703.30.20	1A1323708.30.20
Nuit - Blasted inox	2700K - CLIII	1A1323800.27.20	1A1323803.27.20	1A1323808.27.20
Nuit - Blasted inox	3000K - CLIII	1A1323800.30.20	1A1323803.30.20	1A1323808.30.20

Electrical power supply		Global code	US code	CN code
Driver	24 V - 25 W - IP67 - ON-OFF	1Z1120620	1Z1120620	1Z1120620

Accessories		Global code	US code	CN code
Concrete box		1A4460000.00.00	1A4460000.00.00	1A4460000.00.00
Plaster box		1A4470000.00.00	1A4470000.00.00	1A4470000.00.00

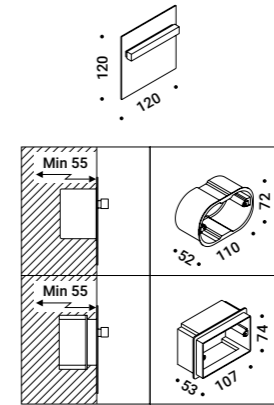

NUIT




Siamo partiti dal buio per rivelare la luce nella sua manifestazione più pura e innocente.

Un piccolo punto nero svela la sua funzione solo quando necessario.  
Per noi il segreto della luce non è nella forma, o in alcuni virtuosismi produttivi, ma nella scelta e nell'assunzione di un metodo, il metodo dello stupore e della memoria.

We started with the darkness to reveal the light in its purest and most innocent manifestation.

A small black dot reveals its function only when necessary.  
For us the secret of light lies not in its shape, or in some technical virtuosity, but in the choice and assumption of a method, the method of amazement and memory.

**BUJO**  
Maurici Ginés, 2023

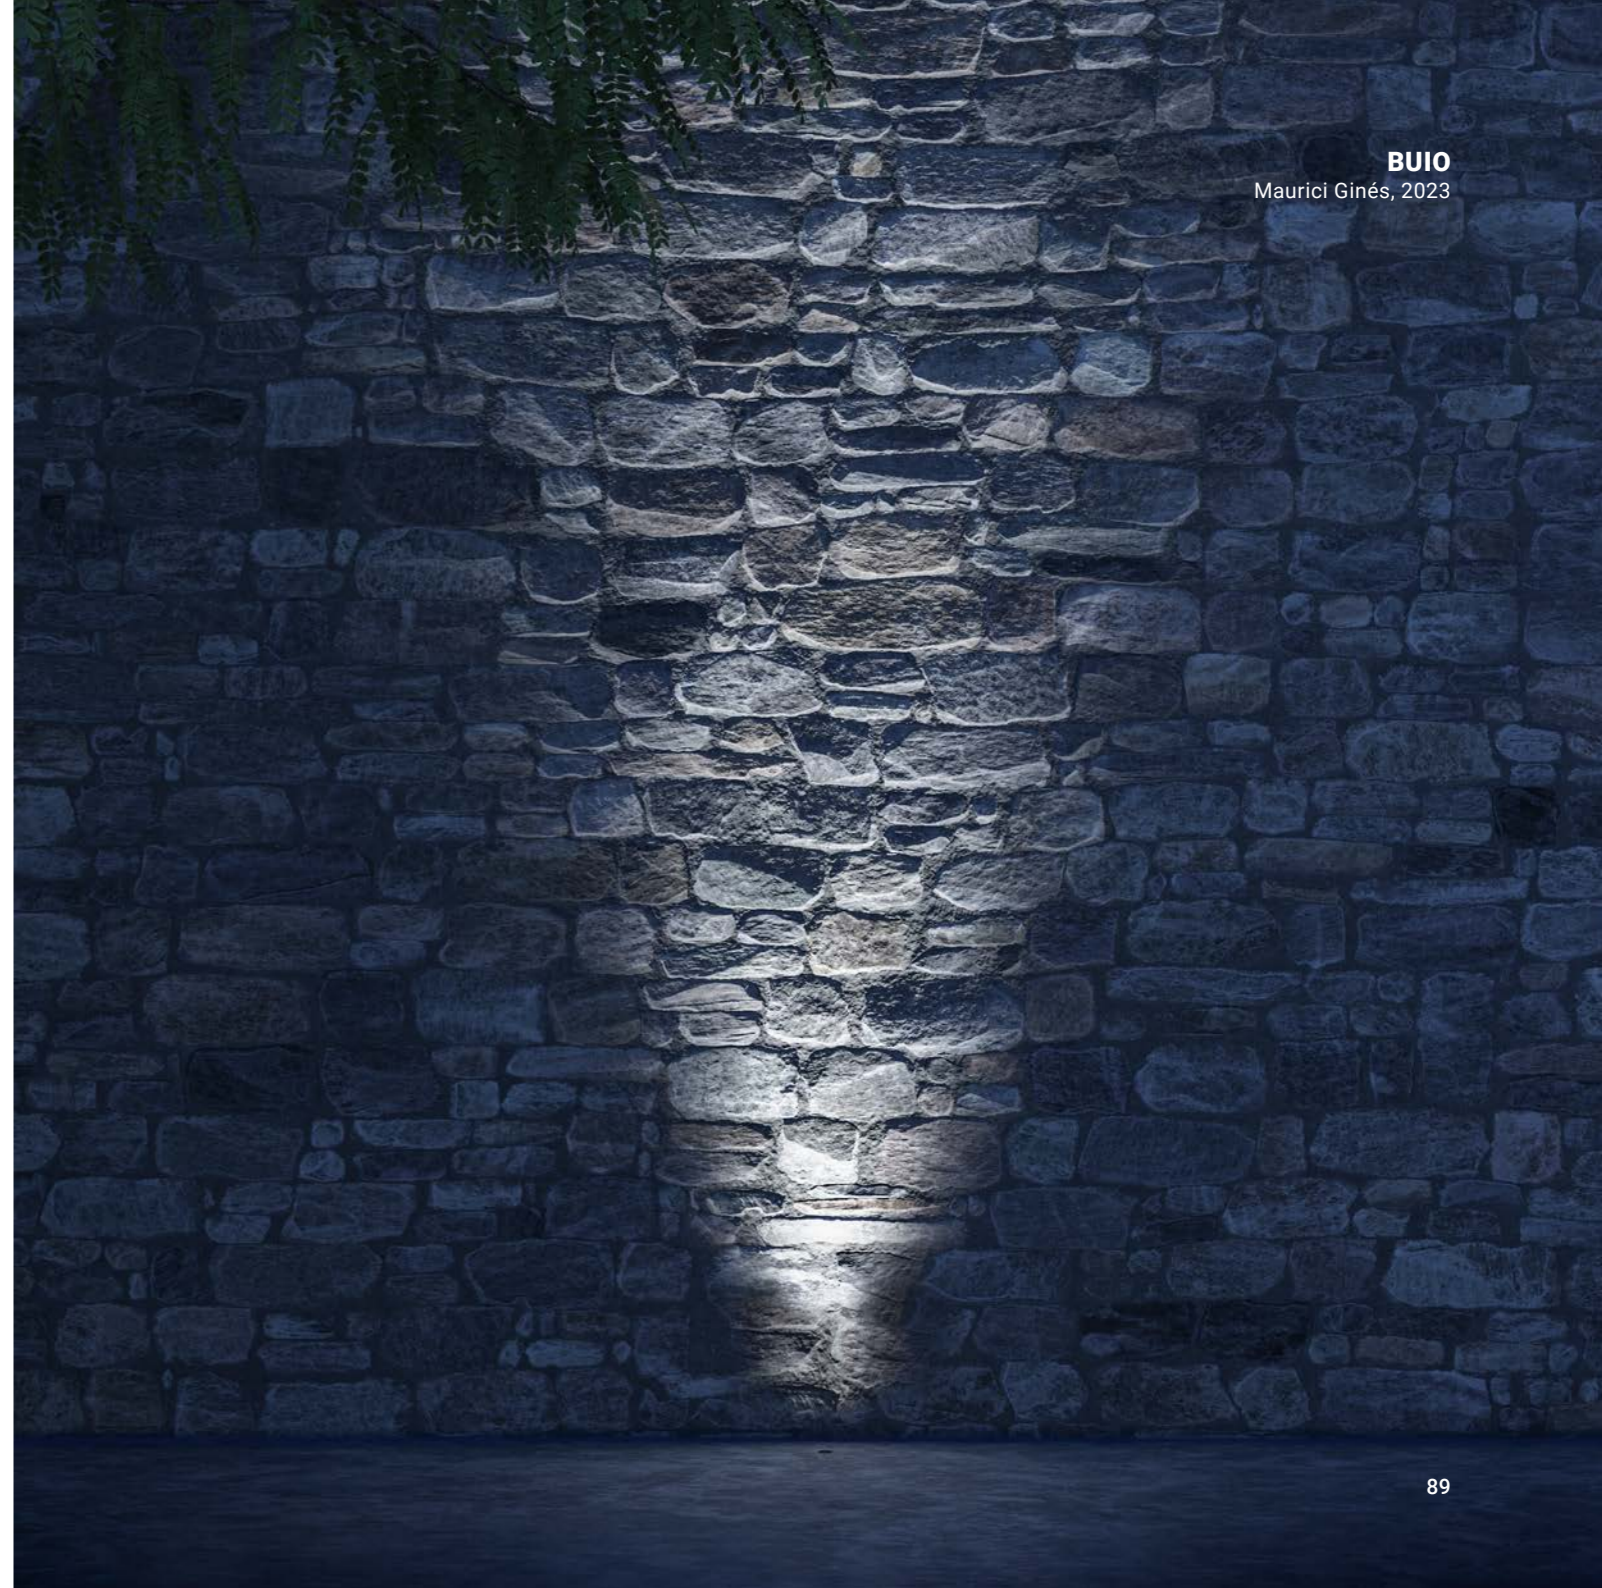



## BUIO

Finish	Matt black
Mounting	Wall / Floor / Recessed
Environment	Indoor / Outdoor
CCT- System flux	2700K ~ 260 lm 3000K ~ 290 lm
CRI	90
<hr/>	
Insulation class	III
Power	4,5 W LED
Beam	25°
LED current	24 V DC
Driver	Remote
Remote dimming type	Not dimmable

CE  IP67











BUIO


## BUIO

		Global code	US code	CN code
<b>Buio - Obscured module - Matt black</b>	2700K - CLIII	1A4370400.27.20	1A4370403.27.20	1A4370408.27.20
<b>Buio - Obscured module - Matt black</b>	3000K - CLIII	1A4370400.30.20	1A4370403.30.20	1A4370408.30.20
<b>Electrical power supply</b>				
		Global code	US code	CN code
<b>Driver</b>	24 V - 25 W - IP67 - ON-OFF	1Z1120620	1Z1120620	1Z1120620
<b>Accessories</b>				
		Global code	US code	CN code
<b>Installation box trim - Matt black</b>		1A4390400.00.00	1A4390400.00.00	1A4390400.00.00
<b>Installation box trimless - Matt black</b>		1A4380400.00.00	1A4380400.00.00	1A4380400.00.00
<b>Filter support and filter - Matt black</b>	Bronze filter	1A4400400.00.00	1A4400400.00.00	1A4400400.00.00
<b>Filter support and filter - Matt black</b>	Gold filter	1A4410400.00.00	1A4410400.00.00	1A4410400.00.00
<b>Snoot - Matt black</b>		1A4420400.00.00	1A4420400.00.00	1A4420400.00.00
<b>Wall bracket - Brushed inox</b>		1A4431000.00.00	1A4431000.00.00	1A4431000.00.00
<b>Ceiling rose - Matt black</b>		1A4440400.00.00	1A4440400.00.00	1A4440400.00.00
<b>Earth spike - Brushed inox</b>		1A4451000.00.00	1A4451000.00.00	1A4451000.00.00


## Accessories for installation

<b>Filter support + Bronze filter</b>	Matt black	
<b>Filter support + Gold filter</b>	Matt black	
<b>Snoot</b>	Matt black	
<b>Wall bracket</b>	Brushed inox	
<b>Ceiling rose</b>	Matt black	
<b>Earth spike</b>	Brushed inox	
<b>Installation box trim</b>	Matt black	
<b>Installation box trimless</b>	Matt black	

Installation box trim

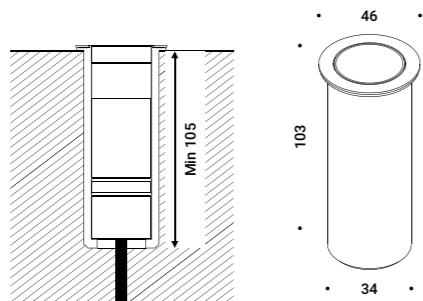

Installation box trimless

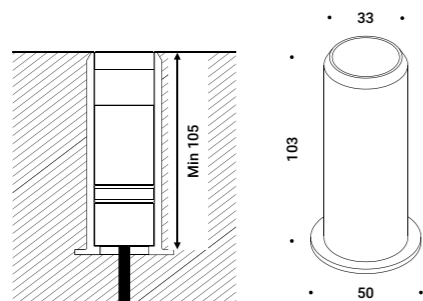


BUJO



Mi hanno sempre emozionato le lampadine abbandonate, nude.  
Sui muri delle case di montagna, nelle campagne della mia pianura.  
Lavori non ancora finiti, lampade ancora da decidere, pensieri effimeri  
che diventano poesia.

I have always been thrilled by bare, abandoned lamps.  
On the walls of mountain huts, in the countryside of my plain.  
Unfinished works, lamps still to be decided, ephemeral thoughts that  
become poetry.

**HAZARD**  
Davide Groppi, 2023

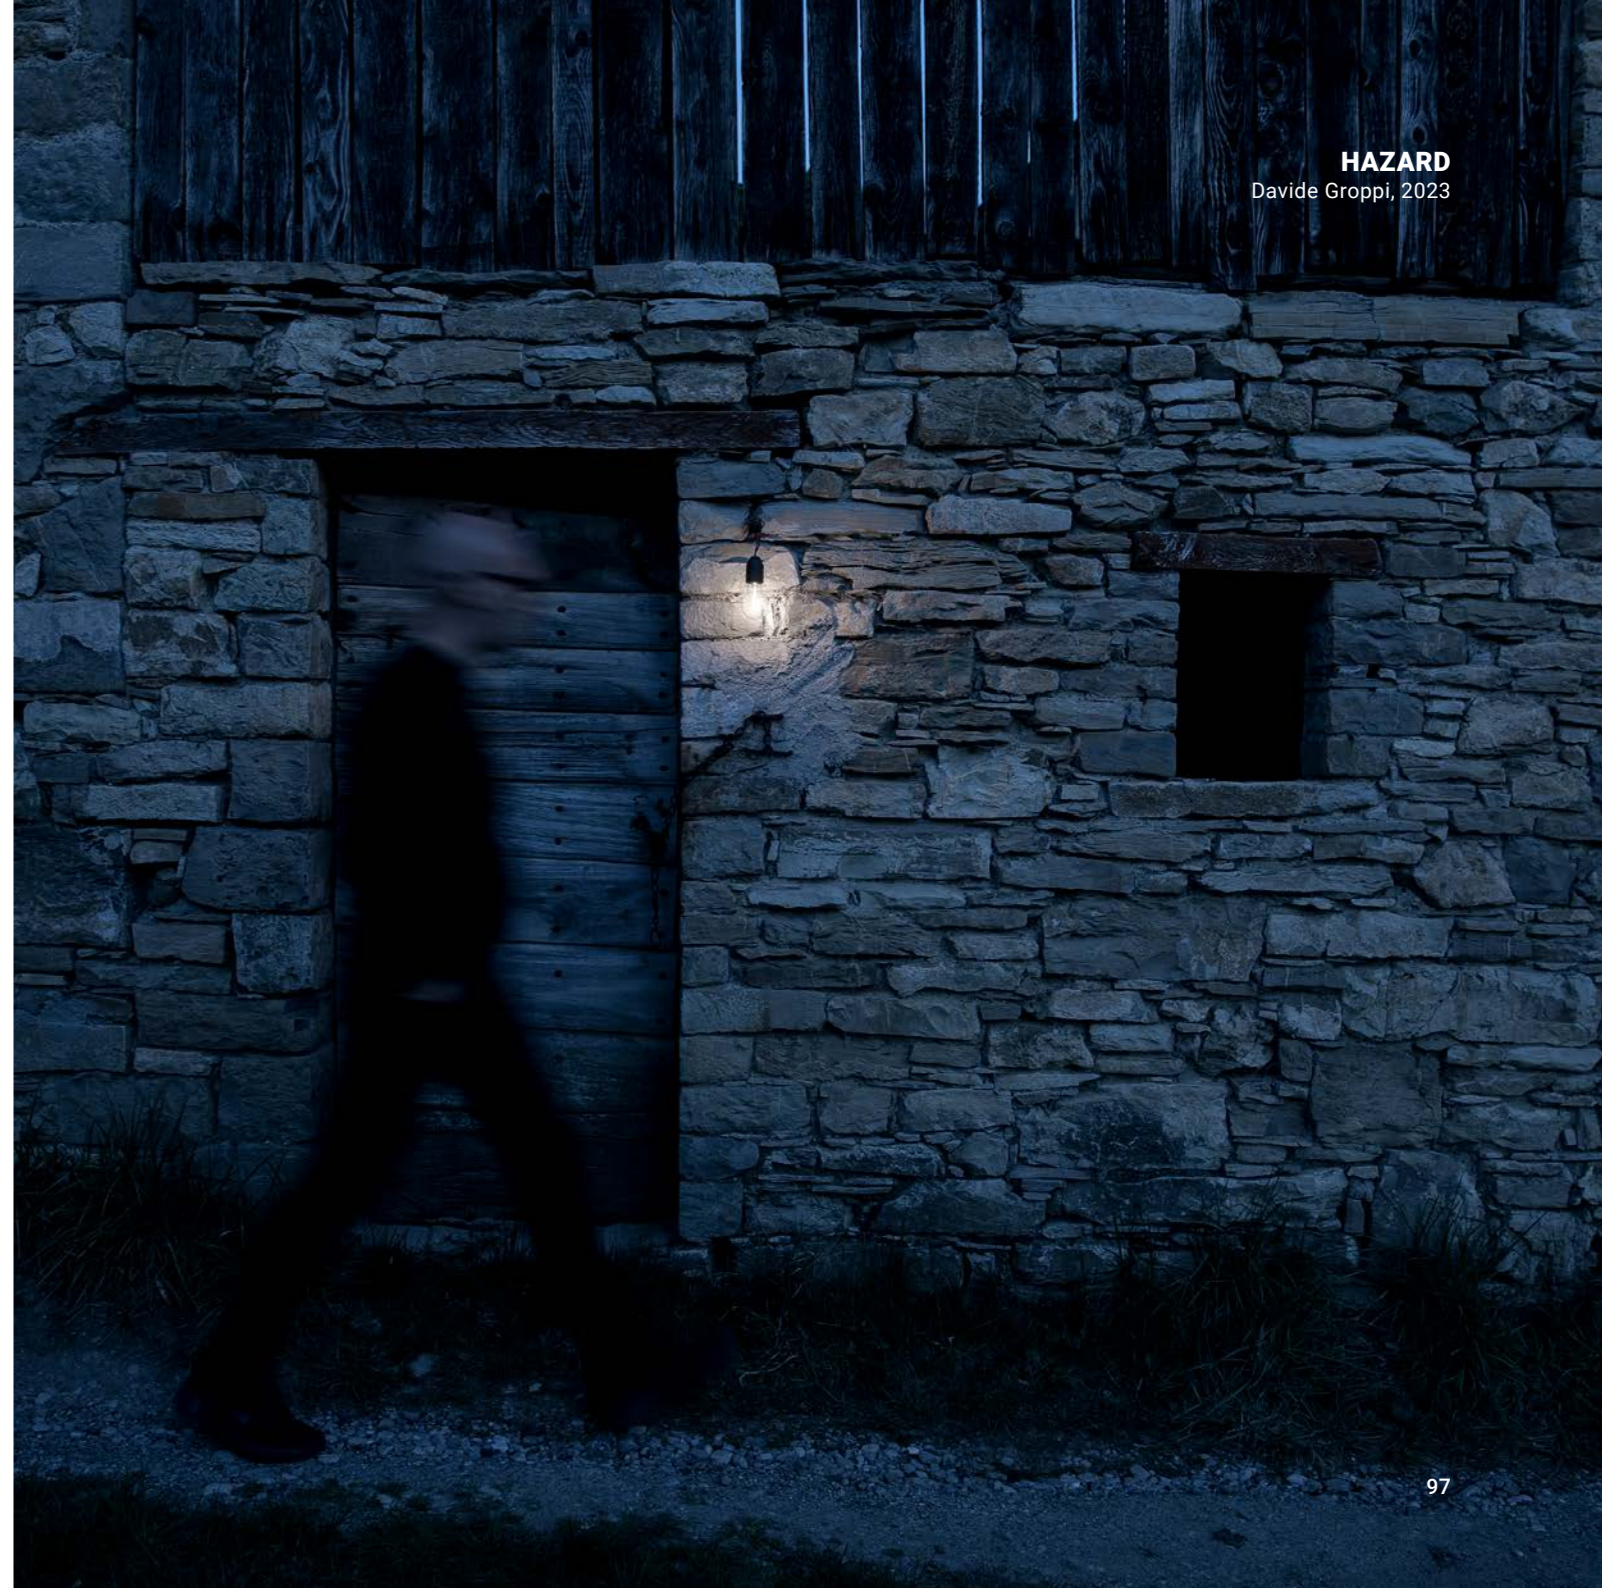




## HAZARD

Lamp not available for US and CN market.

Finish	Standard
Mounting	Wall
Environment	Outdoor
CCT- System flux	2200K - 50 lm
CRI	80
Insulation class	III
Main voltage	36 V DC
Power	0,6 W LED
Socket	E27
Driver	Remote
Dimming type	Not dimmable



CE  IP65



HAZARD



## HAZARD

		Global code	US code	CN code
Hazard	2200K - CLIII	1A4210000.22.20	-	-
Electrical power supply		Global code	US code	CN code
Driver	36 V - 36 W - IP67 - ON-OFF	1Z1120590	-	-



HAZARD



**daidegroppi.com**

Davide Groppi srl  
Via Belizzi 20 / 22  
29122 Piacenza - Italia  
Ph. +39.0523.571590  
info@daidegroppi.com

Davide Groppi srl © 2023  
Company subject to the direction and coordination of Italian Design Brands spa